

Soft Spun Fluorescent Small

SA.5004.1 - Raw

Recessed luminaire for fluorescent lamp Non-dimmable 220/240V ballasts included.




Main specifications

Lamp category	Fluorescent
Power (W)	36W
Mountings	Wall recessed
Environment	Indoor dry location

Optical



Lighting type	Indirect
Lamp type	TC-L
Light distribution	Symmetric
Optical type	Diffused light

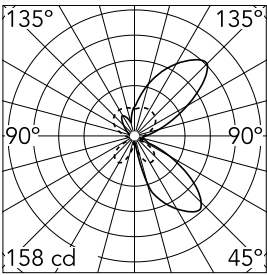

Beam Angle DIR: 84°

h(m)	E(lx)	D(m)
1	158	4.13
2	40	8.26
3	18	12.39
4	10	16.52
5	6	20.65

Luminous flux luminaire
2200 lm

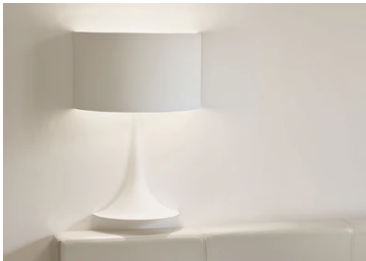

Electrical

Lamp holder	2G11
Dimmable	No
Driver	Integrated
Driver type	Non Dimmable
Emergency	Without

Physical

Color	Raw
Orientation	Fixed
Weight (kg)	11

