



### Soft Spun Large

SA.5009.1 - Raw


Recessed luminaire for lamp, direct connection to mains. Electronic LED driver 220-240V / 50-60Hz integrated.

#### Main specifications

Lamp category	LED retrofit
CRI	90
Net lumen (lm)	1613
Mountings	Wall recessed
Environment	Indoor dry location

#### Optical



Lighting type	Indirect
Lamp type	QT-DE-12
Light distribution	Symmetric
Optical type	Diffused light



Beam Angle DIR: 66°

h(m)	E(lx)	D(m)
1	404	3.04
2	101	6.07
3	45	9.11
4	25	12.15
5	16	15.19

Luminous flux luminaire  
2400 lm

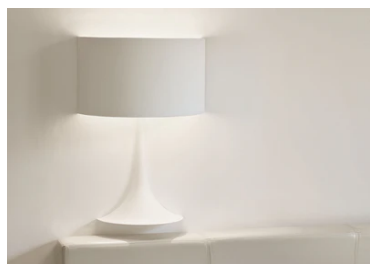

#### Electrical

Lamp holder	R7S
Dimmable	No
Driver	Integrated
Driver type	Electronic 12V
Emergency	Without

#### Physical

Color	Raw
Orientation	Fixed
Weight (kg)	28

#### Note

QT-DE-12 diffuser / LED White base

