


## Soft Spun Small

SA.5005.1 - Raw

Recessed luminaire for lamp, direct connection to mains.

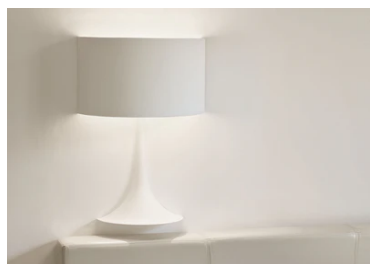


### Main specifications

<b>Lamp category</b>	LED retrofit
<b>Mountings</b>	Wall recessed
<b>Environment</b>	Indoor dry location

### Optical


<b>Lighting type</b>	Indirect
<b>Lamp type</b>	QT-DE-12
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Diffused light

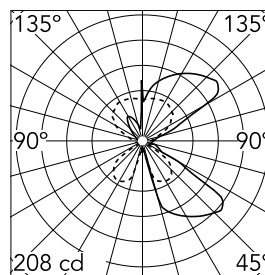

Beam Angle DIR: 67°

h(m)	E(lx)	D(m)
1	208	1.50
2	52	3.00
3	23	4.50
4	13	6.00
5	8	7.49

Luminous flux luminaire  
2250 lm



### Electrical

<b>Lamp holder</b>	R7S
<b>Emergency</b>	Without

### Physical

<b>Color</b>	Raw
<b>Orientation</b>	Fixed
<b>Weight (kg)</b>	11

