



## Spot

New

## 03.2230.14 - Black


Accent lighting LED module to be installed in The Running Magnet System. Built-in DC/DC electronic voltage converter.

## Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 340                 |
| Lamp category   | LED   | Mountings      | Track               |
| Power (W)       | 6W    | Environment    | Indoor dry location |
| CCT (K)         | 2700K |                |                     |
| CRI             | 90    |                |                     |

## Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Spot      |
| Beam angle (°)         | 13        |
| Beam angle C90-270 (°) | 13        |



Beam Angle: 13°

h(m) E(lx) D(m)

1 5646 0.23



2 1411 0.45

3 627 0.68

4 353 0.90

5 226 1.13

Luminous flux luminaire  
340 lm

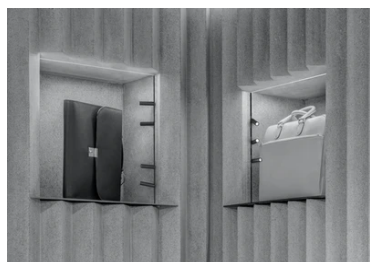


## Electrical

|             |                        |
|-------------|------------------------|
| Dimmable    | Yes                    |
| Driver      | Remote excluded        |
| Driver type | Non Dimmable, Dimmable |

|                  |         |
|------------------|---------|
| Emergency        | Without |
| Insulation class | III     |

## Physical

|              |            |                    |    |
|--------------|------------|--------------------|----|
| Color        | Black      | Spot diameter (mm) | 35 |
| Orientation  | Adjustable | Length (mm)        | 41 |
| Weight (kg)  | 0.07       |                    |    |
| Tilt (°)     | 90         |                    |    |
| Rotation (°) | 267        |                    |    |



## Spot



---

Honeycomb  
08.0191.14