



## Spot 120 Casambi integrated

New

03.8156.05.CB - Polished Aluminium


Accent lighting LED module.

### Main specifications

Number of heads	1	Net lumen (lm)	599
Lamp category	LED	Mountings	Track
Power (W)	12.5W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	40
Beam angle C90-270 (°)	40

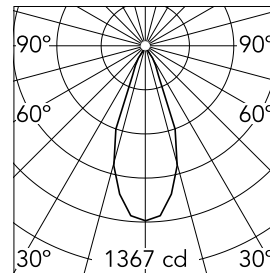

Beam Angle: 40°

h(m) E(lx) D(m)

1 1367 0.73


2 342 1.45

3 152 2.18

4 85 2.91

5 55 3.64

Luminous flux luminaire  
599 lm

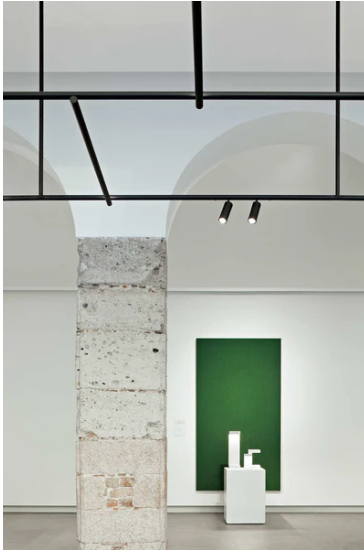

### Electrical

Voltage (V)	48.00	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Dimmable		
	Casambi		
Emergency	Without		

### Physical

Color	Polished Aluminium	Length (mm)	185
Orientation	Adjustable		
Weight (kg)	0.29		
Tilt (°)	90		
Rotation (°)	360		

### Note

Accessories included (honeycomb and screening crosspiece). The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

