



## Spot 150 Casambi integrated

New

03.8074.05.CB - Polished Aluminium


Accent lighting LED module.

### Main specifications

|                        |       |                       |                     |
|------------------------|-------|-----------------------|---------------------|
| <b>Number of heads</b> | 1     | <b>Net lumen (lm)</b> | 1910                |
| <b>Lamp category</b>   | LED   | <b>Mountings</b>      | Track               |
| <b>Power (W)</b>       | 22.5W | <b>Environment</b>    | Indoor dry location |
| <b>CCT (K)</b>         | 2700K |                       |                     |
| <b>CRI</b>             | 90    |                       |                     |

### Optical

|                               |           |
|-------------------------------|-----------|
| <b>Lighting type</b>          | Direct    |
| <b>LED type</b>               | LED array |
| <b>Light distribution</b>     | Symmetric |
| <b>Optical type</b>           | Medium    |
| <b>Beam angle (°)</b>         | 28        |
| <b>Beam angle C90-270 (°)</b> | 28        |


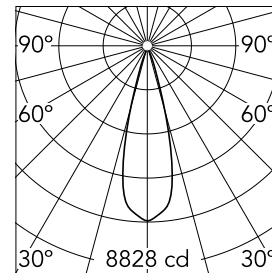


Beam Angle: 28°

h(m) E(lx) D(m)

|   |      |      |
|---|------|------|
| 1 | 8828 | 0.50 |
| 2 | 2207 | 1.00 |
| 3 | 981  | 1.50 |
| 4 | 552  | 2.00 |
| 5 | 353  | 2.50 |

Luminous flux luminaire  
1910 lm

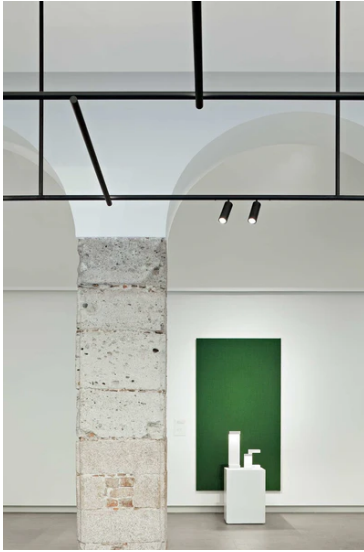

### Electrical


|                    |                 |                         |     |
|--------------------|-----------------|-------------------------|-----|
| <b>Voltage (V)</b> | 48.00           | <b>Insulation class</b> | III |
| <b>Dimmable</b>    | Yes             |                         |     |
| <b>Driver</b>      | Remote excluded |                         |     |
| <b>Driver type</b> | Dimmable        |                         |     |
|                    | Casambi         |                         |     |
| <b>Emergency</b>   | Without         |                         |     |

### Physical

|                     |                    |                    |     |
|---------------------|--------------------|--------------------|-----|
| <b>Color</b>        | Polished Aluminium | <b>Length (mm)</b> | 245 |
| <b>Orientation</b>  | Adjustable         |                    |     |
| <b>Weight (kg)</b>  | 0.42               |                    |     |
| <b>Tilt (°)</b>     | 90                 |                    |     |
| <b>Rotation (°)</b> | 360                |                    |     |

### Note

Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with honeycomb + lense at the same time. The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.



## Spot 150 Casambi integrated



---

Elliptical lens  
08.8431.00



---

Honeycomb  
08.8428.00



---

Flood lens  
08.8432.00



---

Snoot shielding cone  
08.0526.BW



---

Snoot shielding cone  
08.0526.40



---

Snoot shielding cone  
08.0526.00



---

Screening crosspiece  
08.8429.00