

Spot 150 Dali Version

03.8077.05.DA - Polished Aluminium

Accent lighting LED module.




Main specifications

| | | | |
|------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 1983 |
| Lamp category | LED | Mountings | Track |
| Power (W) | 22.5W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |


Optical

| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Flood |
| Beam angle (°) | 40 |
| Beam angle C90-270 (°) | 40 |

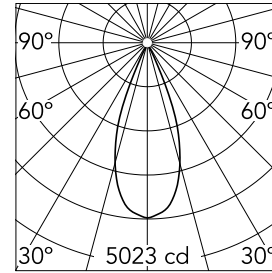

| | | | |
|--------------------|-------------|--------------|-------------|
| Beam Angle: | 40° | | |
| | h(m) | E(lx) | D(m) |
| 1 | 5023 | 0.73 | |
| 2 | 1256 | 1.46 | |
| 3 | 558 | 2.18 | |
| 4 | 314 | 2.91 | |
| 5 | 201 | 3.64 | |

Luminous flux luminaire
1983 lm

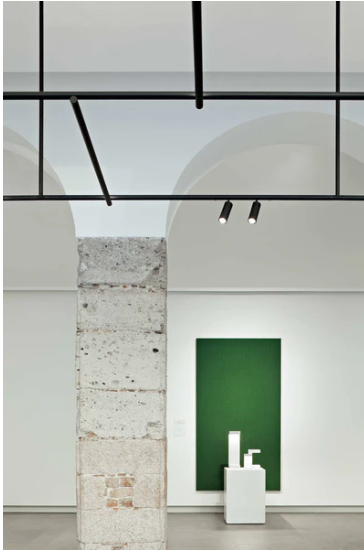

Electrical



| | | | |
|--------------------|-----------------|-------------------------|-----|
| Voltage (V) | 48.00 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote excluded | | |
| Driver type | Dimmable DALI 1 | | |
| Emergency | Without | | |

Physical

| | | | |
|---------------------|--------------------|--------------------|-----|
| Color | Polished Aluminium | Length (mm) | 245 |
| Orientation | Adjustable | | |
| Weight (kg) | 0.42 | | |
| Tilt (°) | 90 | | |
| Rotation (°) | 360 | | |

Note

Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with honeycomb + lense at the same time. Only compatible with DALI profile version.



Spot 150 Dali Version



Honeycomb
08.8428.00



Snoot shielding cone
08.0526.40



Snoot shielding cone
08.0526.BW




Snoot shielding cone
08.0526.00



Screening crosspiece
08.8429.00



Flood lens
08.8432.00



Elliptical lens
08.8431.00