



## Spot 50 Casambi integrated

New

03.8032.05ACB - Polished Aluminium

Accent lighting LED module.

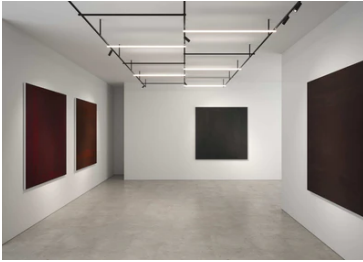


### Main specifications

Number of heads	1	Net lumen (lm)	205
Lamp category	LED	Mountings	Track
Power (W)	3.5W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	26
Beam angle C90-270 (°)	26

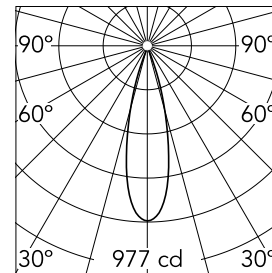

Beam Angle:	26°		
	h(m)	E(lx)	D(m)
1	977	0.47	
2	244	0.94	
3	109	1.41	
4	61	1.88	
5	39	2.35	

Luminous flux luminaire  
205 lm (EXTREME CUT OFF)

### Electrical

Voltage (V)	48	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Dimmable Casambi		
Emergency	Without		

### Physical

Color	Polished Aluminium	Length (mm)	178
Orientation	Adjustable		
Weight (kg)	0.1		
Tilt (°)	90		
Rotation (°)	360		

### Note

Accessories included (honeycomb and screening crosspiece). The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

