

Spot 50 Dali Version

03.8032.05ADA - Polished Aluminium

Accent lighting LED module.




Main specifications

Number of heads	1	Net lumen (lm)	205
Lamp category	LED	Mountings	Track
Power (W)	3.5W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		



Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	26
Beam angle C90-270 (°)	26

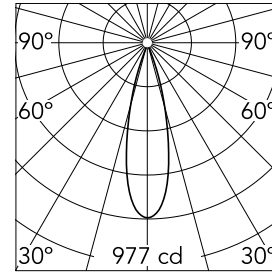

Beam Angle: 26°		
h(m)	E(lx)	D(m)
1	977	0.47
2	244	0.94
3	109	1.41
4	61	1.88
5	39	2.35

Luminous flux luminaire
205 lm (EXTREME CUT OFF)

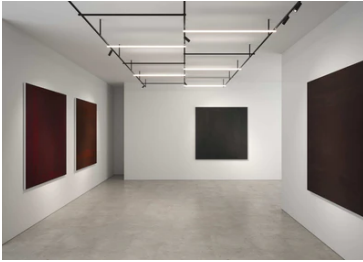

Electrical

Voltage (V)	48	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Dimmable DALI 1		
Emergency	Without		

Physical

Color	Polished Aluminium	Length (mm)	178
Orientation	Adjustable		
Weight (kg)	0.1		
Tilt (°)	90		
Rotation (°)	360		

Note

Accessories included (honeycomb and screening crosspiece). Only compatible with DALI profile version.

