

Spot Module QR-CBC 51

■ 09.0203.14 - Black

Projector to be installed in Light Cut Mini system. Electronic transformer remote not included.




Main specifications

Lamp category	LED retrofit
Mountings	Track
Environment	Indoor dry location

Optical


Lighting type	Direct
Lamp type	QR-CBC 51
Light distribution	Symmetric
Optical type	Spot



Beam Angle: 13°

h(m)	E(lx)	D(m)
1	7833	0.22
2	1958	0.45
3	870	0.67
4	490	0.90
5	313	1.12

Luminous flux luminaire
801 lm



Electrical

Voltage (V)	12.00	Insulation class	III
Lamp holder	GX5.3		
Driver	Remote excluded		
Driver type	Non Dimmable		
Emergency	Without		

Physical


Color	Black
Orientation	Adjustable
Weight (kg)	0.27
Rotation (°)	360
Spot diameter (mm)	57.00




Spot Module QR-CBC 51




Filter-holder
08.8363.30

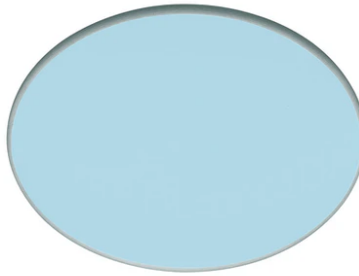

Sky Blue Filter
08.8230.65.OD

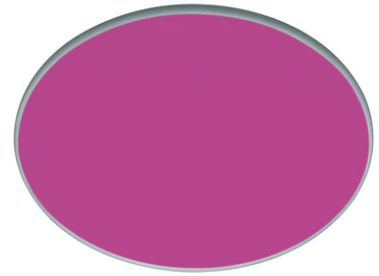


Red Filter
08.8230.67.OD

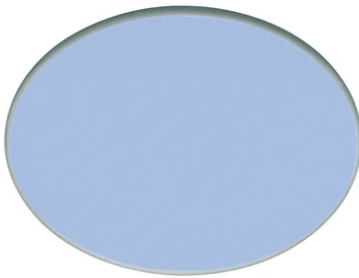

Cold Light
08.8230.CL




Honeycomb
08.8182.14

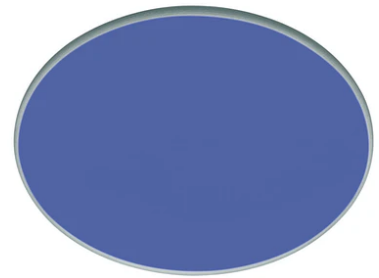

Blue Filter
08.8230.64.OD



Filter-holder
08.8363.14

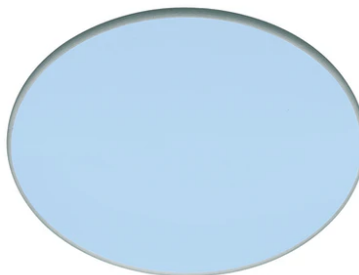


Daylight
08.8230.DL




12V electronic transformer. 230/240V,
50-225W
60.8364



U.V. Filter
08.8230.98.OD

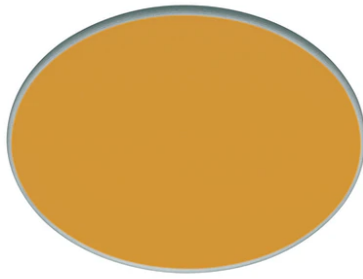

Amber Filter
08.8230.66.OD

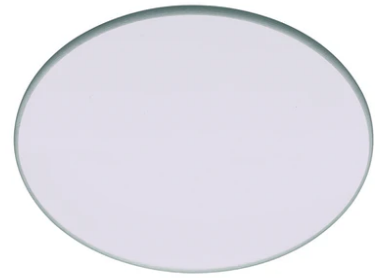

Neodimium
08.8230.ND



Screening cylinder
08.8380.14



Hot Light
08.8230.69



Screening cylinder
08.8380.30