


Spot Module QR-CBC 51

09.0203.30 - White

Projector to be installed in Light Cut Mini system. Electronic transformer remote not included.




Main specifications

Lamp category	Halogen
Power (W)	50W Max.
Mountings	Track
Environment	Indoor dry location

Optical

Lighting type	Direct
Lamp type	QR-CBC 51
Light distribution	Symmetric
Optical type	Spot



Beam Angle: 13°

h(m)	E(lx)	D(m)
1	7833	0.22
2	1958	0.45
3	870	0.67
4	490	0.90
5	313	1.12


Luminous flux luminaire
801 lm

Electrical

Voltage (V)	12.00	Insulation class	III
Lamp holder	GX5.3		
Driver	Remote excluded		
Driver type	Non Dimmable		
Emergency	Without		

Physical

Color	White	Spot diameter (mm)	57.00
Orientation	Adjustable		
Weight (kg)	0.27		
Tilt (°)	180		
Rotation (°)	360		






Spot Module QR-CBC 51



Screening cylinder
08.8380.14

Honeycomb
08.8182.14



Filter-holder
08.8363.14

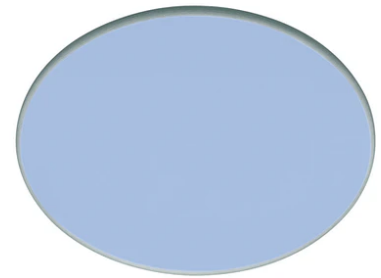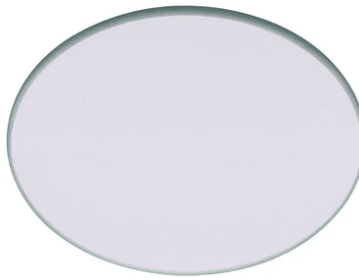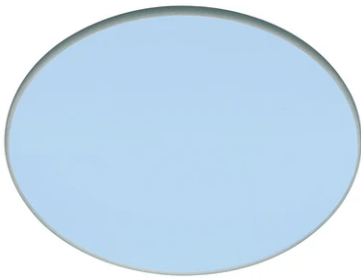

Daylight
08.8230.DL

Neodimium
08.8230.ND

Cold Light
08.8230.CL

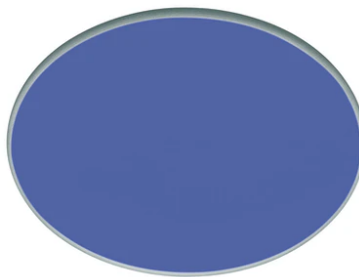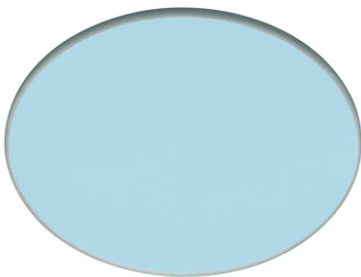


Sky Blue Filter
08.8230.65.OD

Blue Filter
08.8230.64.OD


Screening cylinder
08.8380.30



Filter-holder
08.8363.30

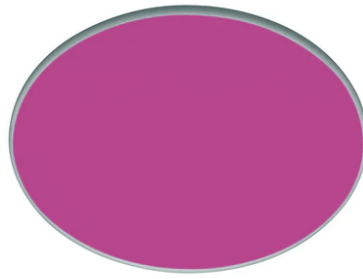

Red Filter
08.8230.67.OD

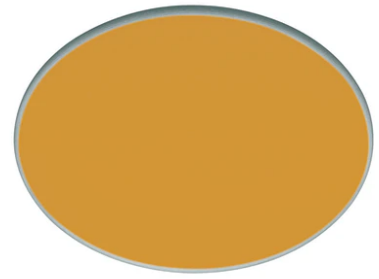

Amber Filter
08.8230.66.OD



U.V. Filter
08.8230.98.OD



Hot Light
08.8230.69



12V electronic transformer. 230/240V,
50-225W
60.8364