



Super Flat Suspension 90x90 Down Dali Version

09.5020.30BDA - White


General lighting LED luminaire to be suspended from ceiling. Power supply included.

Main specifications

| | | | |
|------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 4802 |
| Lamp category | LED | Mountings | Suspension |
| Power (W) | 55W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical



| | |
|-------------------------------|------------|
| Lighting type | Direct |
| LED type | Top LED |
| Light distribution | Symmetric |
| Optical type | Wide flood |
| Beam angle (°) | 104 |
| Beam angle C90-270 (°) | 107 |



Beam Angle: 104°

| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 1804 | 2.58 |
| 2 | 451 | 5.15 |
| 3 | 200 | 7.73 |
| 4 | 113 | 10.31 |
| 5 | 72 | 12.88 |

Luminous flux luminaire
4802 lm (EXTREME CUT OFF)

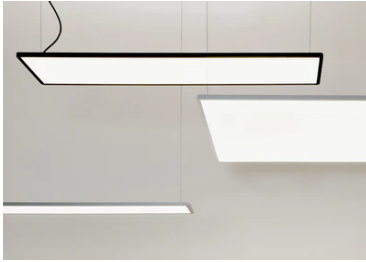

Electrical

| | | | |
|-----------------------|---------------|-------------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 35.00 | Insulation class | I |
| Dimmable | Yes | | |
| Driver | Integrated | | |
| Driver type | Dimmable DALI | | |
| | 1 | | |

Physical

| | |
|--------------------|-------|
| Color | White |
| Orientation | Fixed |
| Weight (kg) | 8.30 |

Note

Total consumption of the system: 55W. Light source: max. 6964 lm. Luminous efficiency of luminaire: max. 138 lm/W.

