



## Super Line Down

### ■ 03.9511.02 - Grey


LED luminaire for general lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately.

### Main specifications

|                  |       |                |                     |
|------------------|-------|----------------|---------------------|
| Number of heads  | 1     | CRI            | 90                  |
| Lamp category    | LED   | Net lumen (lm) | 3814                |
| Power (W)        | 38.6W | Mountings      | Suspension          |
| System power (W) | 39    | Environment    | Indoor dry location |
| CCT (K)          | 4000K |                |                     |

### Optical



|                        |                |
|------------------------|----------------|
| Lighting type          | Direct         |
| LED type               | Top LED        |
| Light distribution     | Symmetric      |
| Optical type           | Diffused light |
| Beam angle (°)         | 76             |
| Beam angle C90-270 (°) | 82             |
| Efficiency (lm/W)      | 97.79          |



Beam Angle: 76°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 2080  | 1.57 |
| 2    | 520   | 3.13 |
| 3    | 231   | 4.70 |
| 4    | 130   | 6.27 |
| 5    | 83    | 7.84 |

Luminous flux luminaire  
3814 lm

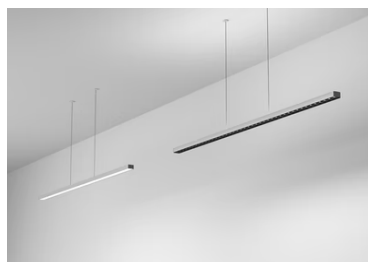

### Electrical


|              |                                |                  |         |
|--------------|--------------------------------|------------------|---------|
| Voltage (V)  | 37.20                          | Emergency        | Without |
| Current (mA) | 1050                           | Insulation class | III     |
| Dimmable     | Yes                            |                  |         |
| Driver       | Remote                         |                  |         |
| Driver type  | Non Dimmable,<br>Dimmable DALI |                  |         |
|              | 1                              |                  |         |

### Physical


|                    |        |
|--------------------|--------|
| Color              | Grey   |
| Orientation        | Fixed  |
| Weight (kg)        | 1.45   |
| Length (mm)        | 1500   |
| Lifespan (L70 B10) | L80B50 |

### Note


Cable 4,25 m



Super Line Down




Surface Kit 60W. Dali Version  
08.0521.02



Recessed Kit 60W. Non Dimmable  
08.0522.02



Remote Power Supply Kit 60W. Non Dimmable  
08.0524.14




Surface Kit 60W. Non Dimmable  
08.0520.02




Remote Power Supply Kit 60W. Dali Version  
08.0525.14



Remote Power Supply Kit 60W. Dali Version  
08.0525.02




Surface Kit 60W. Non Dimmable  
08.0520.40



Recessed Kit 60W. Dali Version  
08.0523.02




Remote Power Supply Kit 60W. Non Dimmable  
08.0524.02




Recessed Kit 60W. Dali Version  
08.0523.40




Remote Power Supply Kit 60W. Non Dimmable  
08.0524.40




Surface Kit 60W. Dali Version  
08.0521.40




Recessed Kit 60W. Non Dimmable  
08.0522.40



Recessed Kit 60W. Non Dimmable  
08.0522.14




Recessed Kit 60W. Dali Version  
08.0523.14



Surface Kit 60W. Non Dimmable  
08.0520.14



Remote Power Supply Kit 60W. Dali Version  
08.0525.40



Surface Kit 60W. Dali Version  
08.0521.14