

Super Line Pro Up&Down

New

03.9560.02 - Grey

LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.


LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.

Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	6126
Power (W)	58W	Mountings	Suspension
System power (W)	60	Environment	Indoor dry location
CCT (K)	3000K		

Optical

Lighting type	Indirect, Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	80
Beam angle C90-270 (°)	80
Beam angle ind (°)	110
Beam angle ind C90-270 (°)	110
UGRL	17
Efficiency (lm/W)	102.1



Beam Angle: 80°

	h(m)	E(lx)	D(m)
1	2367	1.68	
2	592	3.36	
3	263	5.04	
4	148	6.72	
5	95	8.40	

Luminous flux luminaire
6126 lm

Electrical

Voltage (V)	55.80	Emergency	Without
Current (mA)	600	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Non Dimmable, Dimmable DALI		
	1		


Physical

Color	Grey
Orientation	Fixed
Weight (kg)	1.45
Length (mm)	1500
Lifespan (L70 B10)	L80B50


Note

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4,25 m

Super Line Pro Up&Down

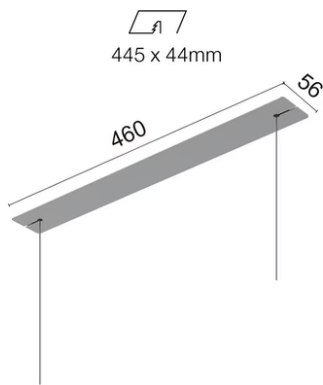


Recessed Kit. Non Dimmable/Dali Version
08.0641.02



Surface Kit. Non Dimmable/Dali Version
08.0640.02



Remote Power Supply Kit. Non Dimmable/Dali Version
08.0642.40




Surface Kit. Non Dimmable/Dali Version
08.0640.14




Remote Power Supply Kit. Non Dimmable/Dali Version
08.0642.02




Remote Power Supply Kit. Non Dimmable/Dali Version
08.0642.14

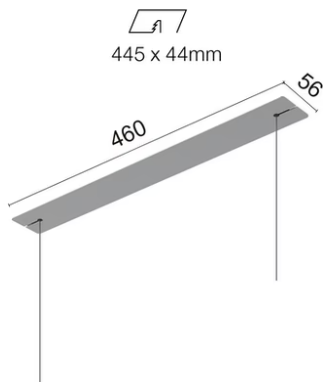

Recessed Kit. Non Dimmable/Dali Version
08.0641.14

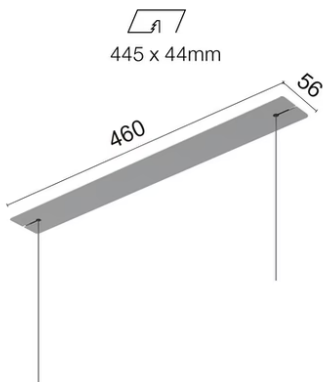

Recessed Kit. Non Dimmable/Dali Version
08.0641.40

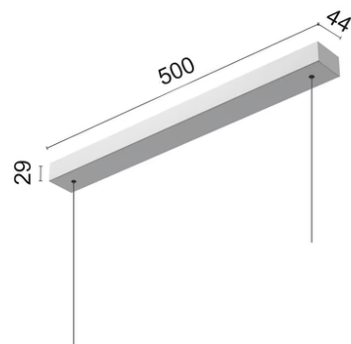

Surface Kit. Non Dimmable/Dali Version
08.0640.40