

Super Line Pro Up&Down

New

03.9560.14 - Black

LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.


LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.

Main specifications

| | | | |
|------------------|-------|----------------|---------------------|
| Number of heads | 1 | CRI | 90 |
| Lamp category | LED | Net lumen (lm) | 5957 |
| Power (W) | 58W | Mountings | Suspension |
| System power (W) | 60 | Environment | Indoor dry location |
| CCT (K) | 3000K | | |

Optical

| | |
|----------------------------|------------------|
| Lighting type | Indirect, Direct |
| LED type | Top LED |
| Light distribution | Symmetric |
| Optical type | Diffused light |
| Beam angle (°) | 80 |
| Beam angle C90-270 (°) | 80 |
| Beam angle ind (°) | 110 |
| Beam angle ind C90-270 (°) | 110 |
| UGRL | 18 |
| Efficiency (lm/W) | 99.28 |



Beam Angle: 80°

| | h(m) | E(lx) | D(m) |
|---|------|-------|------|
| 1 | 2367 | 1.68 | |
| 2 | 592 | 3.36 | |
| 3 | 263 | 5.04 | |
| 4 | 148 | 6.72 | |
| 5 | 95 | 8.40 | |

Luminous flux luminaire
5957 lm

Electrical

| | | | |
|--------------|--------------------------------|------------------|---------|
| Voltage (V) | 55.80 | Emergency | Without |
| Current (mA) | 600 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote | | |
| Driver type | Non Dimmable, Dimmable DALI | | |
| | 1 | | |


Physical

| | |
|--------------------|--------|
| Color | Black |
| Orientation | Fixed |
| Weight (kg) | 1.45 |
| Length (mm) | 1500 |
| Lifespan (L70 B10) | L80B50 |

Note

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4,25 m


Super Line Pro Up&Down

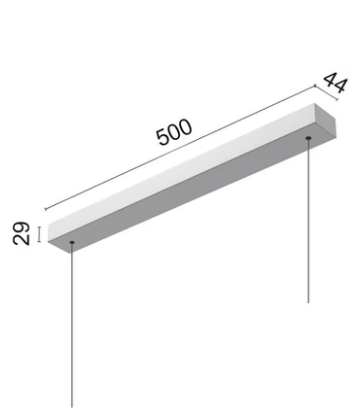

Surface Kit. Non Dimmable/Dali Version
08.0640.02




Remote Power Supply Kit. Non Dimmable/Dali Version
08.0642.40

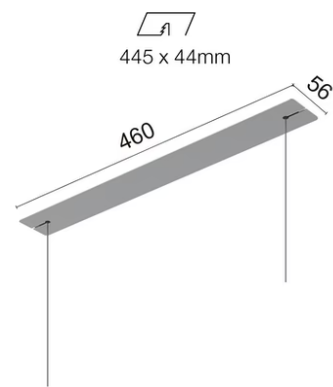


Recessed Kit. Non Dimmable/Dali Version
08.0641.40




Remote Power Supply Kit. Non Dimmable/Dali Version
08.0642.02

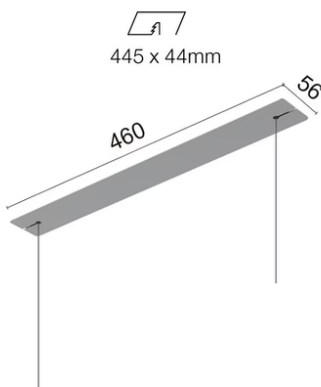


Recessed Kit. Non Dimmable/Dali Version
08.0641.02

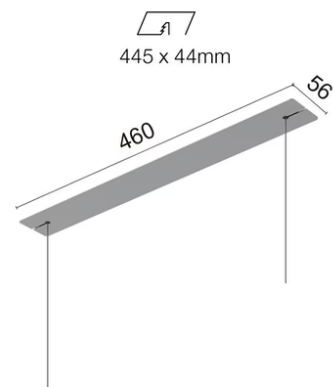

Recessed Kit. Non Dimmable/Dali Version
08.0641.14

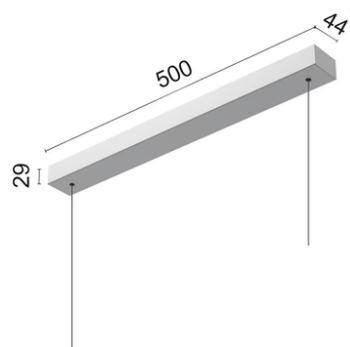

Surface Kit. Non Dimmable/Dali Version
08.0640.14



Surface Kit. Non Dimmable/Dali Version
08.0640.40



Remote Power Supply Kit. Non Dimmable/Dali Version
08.0642.14