



## Super Line Pro Up&Down

New

### 03.9561.14 - Black

LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.


LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.

### Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	7301
Power (W)	58W	Mountings	Suspension
System power (W)	60	Environment	Indoor dry location
CCT (K)	4000K		

### Optical



Lighting type	Indirect, Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	80
Beam angle C90-270 (°)	80
Beam angle ind (°)	110
Beam angle ind C90-270 (°)	110
UGRL	17
Efficiency (lm/W)	121.68

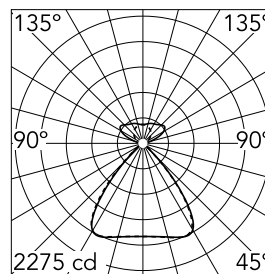

Beam Angle: 80°

	h(m)	E(lx)	D(m)
1	2275	1.68	
2	569	3.36	
3	253	5.04	
4	142	6.72	
5	91	8.40	

Luminous flux luminaire  
7301 lm

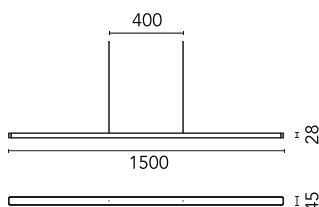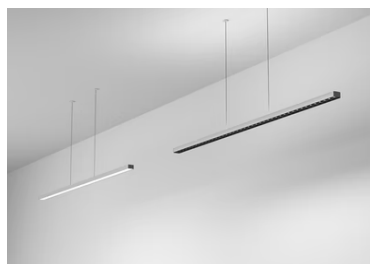

### Electrical

Voltage (V)	55.80	Emergency	Without
Current (mA)	600	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Non Dimmable, Dimmable DALI		
	1		


### Physical

Color	Black
Orientation	Fixed
Weight (kg)	1.45
Length (mm)	1500
Lifespan (L70 B10)	L80B50


### Note

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4,25 m


# Super Line Pro Up&Down

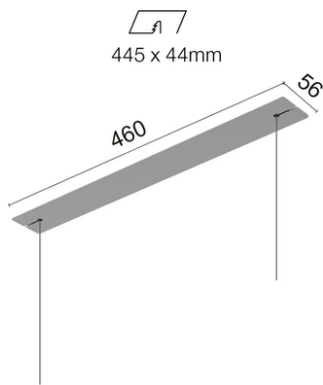


Recessed Kit. Non Dimmable/Dali Version  
08.0641.40

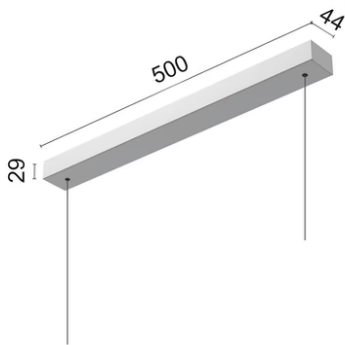

Surface Kit. Non Dimmable/Dali Version  
08.0640.40

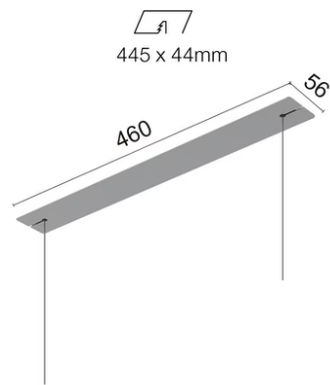


Recessed Kit. Non Dimmable/Dali Version  
08.0641.02

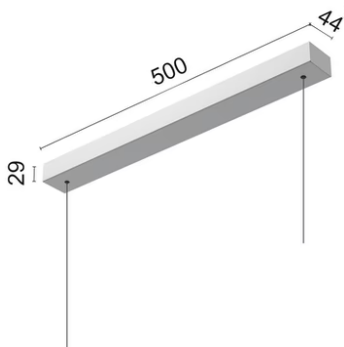

Surface Kit. Non Dimmable/Dali Version  
08.0640.02



Remote Power Supply Kit. Non Dimmable/Dali Version  
08.0642.40

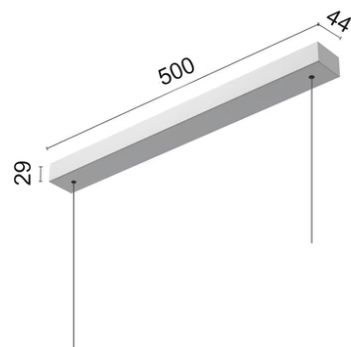


Surface Kit. Non Dimmable/Dali Version  
08.0640.14



Remote Power Supply Kit. Non Dimmable/Dali Version  
08.0642.02



Remote Power Supply Kit. Non Dimmable/Dali Version  
08.0642.14

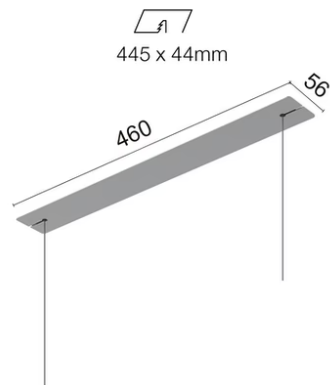

Recessed Kit. Non Dimmable/Dali Version  
08.0641.14