



## The Black Line No Trim 12 Spots

■ 03.0063.14ANT - Black

Recessed integrated luminaire with 12 LED lighting spots. 1050 mA remote power supply not included.

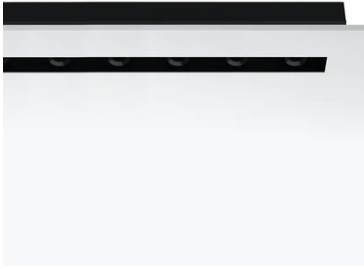


### Main specifications

<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	39W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	2700K		
<b>CRI</b>	90		
<b>Net lumen (lm)</b>	2046		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Spot
<b>Beam angle (°)</b>	11
<b>Beam angle C90-270 (°)</b>	12

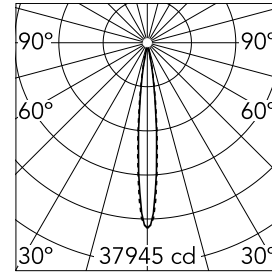

<b>Beam Angle:</b>	12°		
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>	
1	37945	0.20	
2	9486	0.40	
3	4216	0.60	
4	2372	0.80	
5	1518	1.00	

Luminous flux luminaire  
2046 lm (EXTREME CUT OFF)

### Electrical


<b>Dimmable</b>	No
<b>Driver</b>	Remote excluded
<b>Driver type</b>	Non Dimmable
<b>Emergency</b>	Without
<b>Insulation class</b>	III

### Physical

<b>Color</b>	Black
<b>Orientation</b>	Fixed
<b>Recessed depth (mm)</b>	100
<b>Weight (kg)</b>	3.41
<b>Length (mm)</b>	990

### Note

No Trim version can be connected in a continuous line.



## The Black Line No Trim 12 Spots



---

Continuous current power supply of  
25-50W, 110/240V – 50/60Hz with power  
current selected through adjustable  
350mA – 25W /500mA – 35W/ 700mA –  
50W /750mA – 54W /900/ 1050 mA –  
60W switch. Dali 2, 0/1-10V or push  
dimming  
60.8530