




The Black Line No Trim 2 Spots

■ 03.0053.14ANT - Black

Recessed integrated luminaire with 2 LED lighting spots. 1050 mA remote power supply not included.

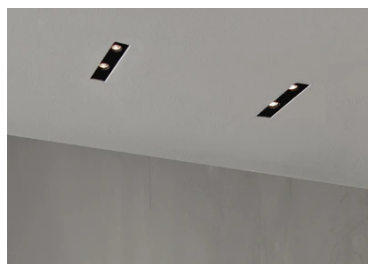


Main specifications

Number of heads	2	Net lumen (lm)	313
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	6.5W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	42
Beam angle C90-270 (°)	44

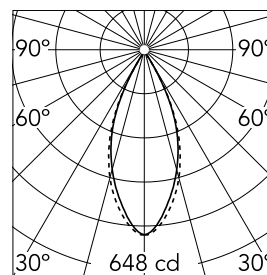

Beam Angle: 44°

h(m)	E(lx)	D(m)
1	648	0.77
2	162	1.54
3	72	2.31
4	40	3.08
5	26	3.85

Luminous flux luminaire
313 lm (EXTREME CUT OFF)

Electrical

Dimmable	No
Driver	Remote excluded
Driver type	Non Dimmable
Emergency	Without
Insulation class	III

Physical

Color	Black
Orientation	Fixed
Recessed depth (mm)	100
Weight (kg)	0.74
Length (mm)	190

Note

No Trim version can be connected in a continuous line.

The Black Line No Trim 2 Spots



Continuous current power supply of
25-50W, 110/240V – 50/60Hz with power
current selected through adjustable
350mA – 25W /500mA – 35W/ 700mA –
50W /750mA – 54W /900/ 1050 mA –
60W switch. Dali 2, 0/1-10V or push
dimming
60.8530