


The Black Line Trim 12 Spots

03.0062.00A - Primer

Recessed integrated luminaire with 12 LED lighting spots. 1050 mA remote power supply not included.

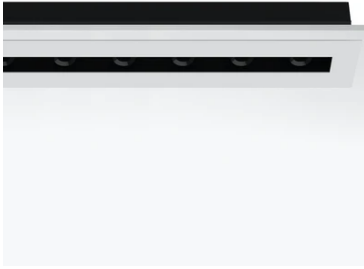


Main specifications

| | | | |
|-----------------------|-------|--------------------|------------------|
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 39W | Environment | Indoor |
| CCT (K) | 3000K | | |
| CRI | 90 | | |
| Net lumen (lm) | 2330 | | |


Optical

| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 11 |
| Beam angle C90-270 (°) | 12 |

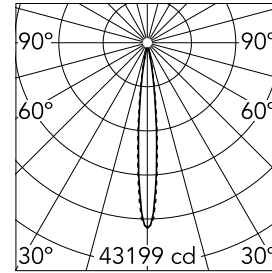

| | | | |
|--------------------|--------------|-------------|--|
| Beam Angle: | 12° | | |
| h(m) | E(lx) | D(m) | |
| 1 | 43199 | 0.20 | |
| 2 | 10800 | 0.40 | |
| 3 | 4800 | 0.60 | |
| 4 | 2700 | 0.80 | |
| 5 | 1728 | 1.00 | |

Luminous flux luminaire
2330 lm (EXTREME CUT OFF)



Electrical

| | | | |
|-----------------------|------------|-------------------------|-----|
| Frequency (Hz) | 50/60 | Insulation class | III |
| Dimmable | No | | |
| Driver | Remote | | |
| Driver type | Electronic | | |
| Emergency | Without | | |

Physical

| | |
|----------------------------|--------|
| Color | Primer |
| Orientation | Fixed |
| Recessed depth (mm) | 105 |
| Weight (kg) | 3.81 |
| Length (mm) | 1031 |

Certification / Marking

