



The Black Line Trim 12 Spots

03.0065.00A - Primer

Recessed integrated luminaire with 12 LED lighting spots. 1050 mA remote power supply not included.

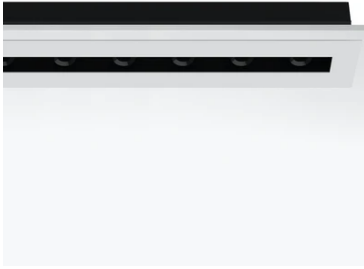


Main specifications

Lamp category	LED	Mountings	Ceiling recessed
Power (W)	39W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		
Net lumen (lm)	1879		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	42
Beam angle C90-270 (°)	44

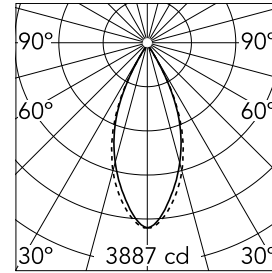

Beam Angle:	44°		
h(m)	E(lx)	D(m)	
1	3887	0.77	
2	972	1.54	
3	432	2.31	
4	243	3.08	
5	155	3.85	


Luminous flux luminaire
1879 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Insulation class	III
Dimmable	No		
Driver	Remote excluded		
Driver type	Non Dimmable		
Emergency	Without		

Physical

Color	Primer
Orientation	Fixed
Recessed depth (mm)	105
Weight (kg)	3.81
Length (mm)	1031

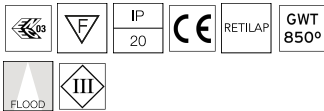

The Black Line Trim 12 Spots



Continuous current power supply of
25-50W, 110/240V – 50/60Hz with power
current selected through adjustable
350mA – 25W /500mA – 35W/ 700mA –
50W /750mA – 54W /900/ 1050 mA –
60W switch. Dali 2, 0/1-10V or push
dimming
60.8530