




## The Black Line Trim 2 Spots

03.0051.40A - White

Recessed integrated luminaire with 2 LED lighting spots. 1050 mA remote power supply not included.

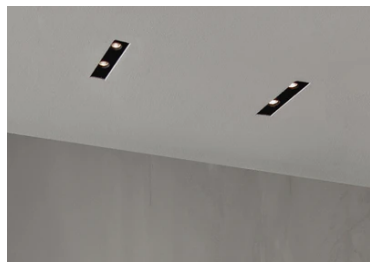


### Main specifications

|                       |       |                    |                     |
|-----------------------|-------|--------------------|---------------------|
| <b>Lamp category</b>  | LED   | <b>Mountings</b>   | Ceiling recessed    |
| <b>Power (W)</b>      | 6.5W  | <b>Environment</b> | Indoor dry location |
| <b>CCT (K)</b>        | 2700K |                    |                     |
| <b>CRI</b>            | 90    |                    |                     |
| <b>Net lumen (lm)</b> | 341   |                    |                     |

### Optical

|                               |           |
|-------------------------------|-----------|
| <b>Lighting type</b>          | Direct    |
| <b>LED type</b>               | Power LED |
| <b>Light distribution</b>     | Symmetric |
| <b>Optical type</b>           | Spot      |
| <b>Beam angle (°)</b>         | 11        |
| <b>Beam angle C90-270 (°)</b> | 12        |



Beam Angle: 12°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 6324  | 0.20 |
| 2    | 1581  | 0.40 |
| 3    | 703   | 0.60 |
| 4    | 395   | 0.80 |
| 5    | 253   | 1.00 |

Luminous flux luminaire  
341 lm (EXTREME CUT OFF)

### Electrical

|                       |                 |                         |     |
|-----------------------|-----------------|-------------------------|-----|
| <b>Frequency (Hz)</b> | 50/60           | <b>Insulation class</b> | III |
| <b>Dimmable</b>       | No              |                         |     |
| <b>Driver</b>         | Remote excluded |                         |     |
| <b>Driver type</b>    | Non Dimmable    |                         |     |
| <b>Emergency</b>      | Without         |                         |     |

### Physical

|                            |       |
|----------------------------|-------|
| <b>Color</b>               | White |
| <b>Orientation</b>         | Fixed |
| <b>Recessed depth (mm)</b> | 105   |
| <b>Weight (kg)</b>         | 0.84  |
| <b>Length (mm)</b>         | 231   |

## The Black Line Trim 2 Spots



---

Continuous current power supply of  
25-50W, 110/240V – 50/60Hz with power  
current selected through adjustable  
350mA – 25W /500mA – 35W/ 700mA –  
50W /750mA – 54W /900/ 1050 mA –  
60W switch. Dali 2, 0/1-10V or push  
dimming  
60.8530