




The Black Line Trim 4 Spots

03.0054.00A - Primer

Recessed integrated luminaire with 4 LED lighting spots. 1050 mA remote power supply not included.

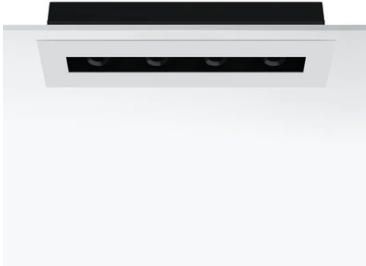


Main specifications

Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		
Net lumen (lm)	777		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	11
Beam angle C90-270 (°)	12

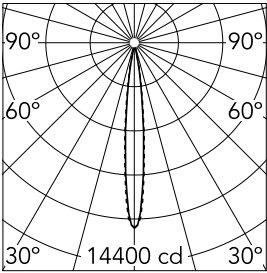

Beam Angle:		12°
h(m)	E(lx)	D(m)
1	14400	0.20
2	3600	0.40
3	1600	0.60
4	900	0.80
5	576	1.00

Luminous flux luminaire
777 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Insulation class	III
Dimmable	No		
Driver	Remote excluded		
Driver type	Non Dimmable		
Emergency	Without		

Physical

Color	Primer
Orientation	Fixed
Recessed depth (mm)	105
Weight (kg)	1.47
Length (mm)	391

The Black Line Trim 4 Spots



Continuous current power supply of
20-40W, 110/240V – 50/60Hz. Power
current selected through adjustable
350mA-18,5W / 400mA-21W / 500mA-
26,5W / 600mA-31,5W / 650mA-34,5W /
700mA-37W / 750mA-39,5W /
800/850/900/950/1000/1050/1200 mA-
40W switch
60.9276

Constant Current Power Supply for
LED. 24/33W
60.8548