

### The Black Line Trim 8 Spots

03.0059.40A - White


Recessed integrated luminaire with 8 LED lighting spots. 1050 mA remote power supply not included.

#### Main specifications

|                |       |             |                     |
|----------------|-------|-------------|---------------------|
| Lamp category  | LED   | Mountings   | Ceiling recessed    |
| Power (W)      | 26W   | Environment | Indoor dry location |
| CCT (K)        | 2700K |             |                     |
| CRI            | 90    |             |                     |
| Net lumen (lm) | 1364  |             |                     |

#### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Spot      |
| Beam angle (°)         | 11        |
| Beam angle C90-270 (°) | 12        |



Beam Angle: 12°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 25297 | 0.20 |
| 2    | 6324  | 0.40 |
| 3    | 2811  | 0.60 |
| 4    | 1581  | 0.80 |
| 5    | 1012  | 1.00 |




Luminous flux luminaire  
1364 lm (EXTREME CUT OFF)

#### Electrical

|                |                 |                  |     |
|----------------|-----------------|------------------|-----|
| Frequency (Hz) | 50/60           | Insulation class | III |
| Dimmable       | No              |                  |     |
| Driver         | Remote excluded |                  |     |
| Driver type    | Non Dimmable    |                  |     |
| Emergency      | Without         |                  |     |

#### Physical

|                     |       |
|---------------------|-------|
| Color               | White |
| Orientation         | Fixed |
| Recessed depth (mm) | 105   |
| Weight (kg)         | 2.45  |
| Length (mm)         | 711   |

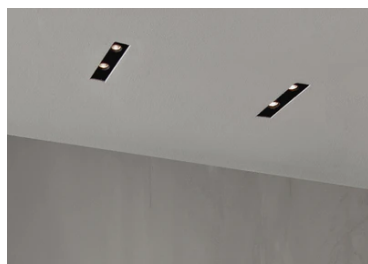

## The Black Line Trim 8 Spots



---

Continuous current power supply of  
20-40W, 110/240V – 50/60Hz. Power  
current selected through adjustable  
350mA-18,5W / 400mA-21W / 500mA-  
26,5W / 600mA-31,5W / 650mA-34,5W /  
700mA-37W / 750mA-39,5W /  
800/850/900/950/1000/1050/1200 mA-  
40W switch  
60.9276

---

Constant Current Power Supply for  
LED. 24/33W  
60.8548