

The Fast Track Recessed Profile

■ 06.1851.14 - Black

Electro-mechanical profile for recessed installations in plasterboard ceilings, with 1m to 3m lengths. Power and interconnection cables must be ordered separately. The covers must be ordered separately. Fixed or adjustable fastening kits available (optional). The roof fastening kits enable installation without the need for aluminium TC fastening profiles.

Main specifications



Mountings	Recessed
Environment	Indoor dry location

Electrical

Voltage (V)	48.00
Driver	Remote excluded
Emergency	Without

Physical

Color	Black
Weight (kg)	4.2
Length (mm)	1500

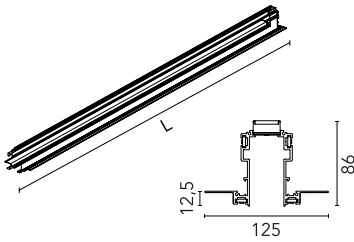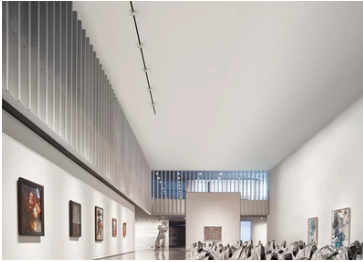

The Fast Track Recessed Profile



Adjustable ceiling kit. 2 unit kit
08.8867.14



LED Power Supply Source for remote
installation. 48V/320W. 100/240 Vac
60.8919



LED Power Supply Source for remote
installation. 48V. 100Vac (150W)-240Vac
(200W)
60.9607



Fixed ceiling kit. 2 unit kit
08.8866.14