

The Micro Running Magnet Recessed Profile

New

06.6000.14 - Black

Electromechanical profile of reduced size for recessed installation in plasterboard ceilings/walls with lengths from 1 to 3 m.

Main specifications

Power (W)	MAX 120W
Mountings	Recessed
Environment	Indoor dry location

Electrical

Voltage (V)	24	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1		
Emergency	Without		


Physical

Color	Black
Weight (kg)	0.48
Length (mm)	1000


Note

Fastening accessories included with the profiles. 90° corners available in the same plane (symmetrical element for left and right corners).

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.

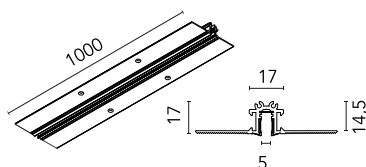

The Micro Running Magnet Recessed Profile



Casambi Controller 220-240V. Remote Installation
60.9392



Recessed/Surface End Caps. 1 unit kit
06.6036.14



Recessed/Surface Feed Connector
06.6034.14



24V Remote power supply. Dimmable through CASAMBI protocol. 120W
110/240V
60.9683



Recessed/Surface Intermediate Connector
06.6035.14



24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. 25W
110/240V
60.9359



24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. Dimming range 20-100%. 36W
110V / 45W-240V
60.9816



24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. 57W
220/240V
60.9361



24V Remote power supply. Dimmable through DALI protocol. 120W
110/240V
60.9682



24V Remote power supply. Dimmable
through 1/10V protocol. 120W 110/240V
60.9681