
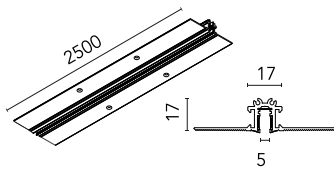


The Micro Running Magnet Recessed Profile

New

06.6003.14 - Black

Electromechanical profile of reduced size for recessed installation in plasterboard ceilings/walls with lengths from 1 to 3 m.

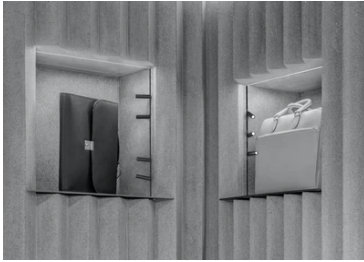

Main specifications

Power (W)	MAX 120W
Mountings	Recessed
Environment	Indoor dry location

Electrical

Dimmable	Yes
Driver	Remote excluded
Driver type	Non Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1
Emergency	Without

Physical

Color	Black
Length (mm)	2500

Note

Fastening accessories included with the profiles. 90° corners available in the same plane (symmetrical element for left and right corners).



The Micro Running Magnet Recessed Profile



24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. 25W 110/240V
60.9359



24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. 57W 220/240V
60.9361



24V Remote power supply. Dimmable through DALI protocol. 120W 110/240V
60.9426



24V Remote power supply. Dimmable through 1/10V protocol. 120W 110/240V
60.9416



Casambi Controller 220-240V. Remote Installation
60.9392



24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. Dimming range 20-100%. 36W-110V / 45W-240V
60.9360