
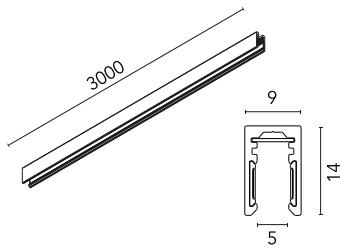


## The Micro Running Magnet Surface Profile

New

### 06.6014.14 - Black

Electromechanical profile of reduced size for installation on surfaces with lengths from 1 to 3 m.

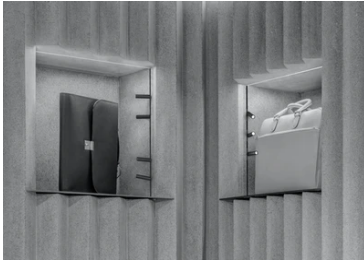

### Main specifications

<b>Power (W)</b>	MAX 120W
<b>Mountings</b>	Surface
<b>Environment</b>	Indoor dry location

### Electrical

<b>Dimmable Driver</b>	Yes Remote excluded
<b>Driver type</b>	Non Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1
<b>Emergency</b>	Without

### Physical

<b>Color</b>	Black
<b>Length (mm)</b>	3000

### Note

Fastening accessories included with the profiles. 90° corners available in the same plane (symmetrical element for left and right corners). The inner part of the profile is always supplied in black.



## The Micro Running Magnet Surface Profile



---

Casambi Controller 220-240V. Remote Installation  
60.9392



---

24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. Dimming range 20-100%. 36W-110V / 45W-240V  
60.9360



---

24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. 57W 220/240V  
60.9361



---

24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. 25W 110/240V  
60.9359



---

24V Remote power supply. Dimmable through 1/10V protocol. 120W 110/240V  
60.9416



---

24V Remote power supply. Dimmable through DALI protocol. 120W 110/240V  
60.9426