

## The Running Magnet Suspension Down Feed Unit Profile

### ■ 06.1626.14 - Black

Electromechanical track for suspended installations. Linear tracks available in two versions: power feed profiles for connecting to a driver, and intermediate profiles.

#### Main specifications

<b>Mountings</b>	Suspension
<b>Environment</b>	Indoor dry location

#### Electrical

<b>Voltage (V)</b>	24.00
<b>Driver</b>	Remote excluded
<b>Driver type</b>	Non Dimmable, Dimmable, Casambi, Dimmable DALI 1
<b>Emergency</b>	Without

#### Physical

<b>Color</b>	Black
<b>Weight (kg)</b>	2.80
<b>Length (mm)</b>	1000

#### Note

Covers included with the power feed profiles.


Ceiling connection (4.2 m feed cable) and suspension (4 m steel cable) accessories included in all linear feed or intermediate products.

90° corners in the same plane (symmetrical element for right and left corners) for the Surface and Down versions. Provided for connection to the driver.


The inner part of the profile is always supplied in black.



# The Running Magnet Suspension Down Feed Unit Profile

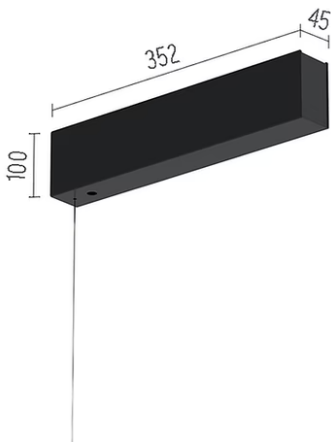

DALI controller and 24V/185W equipment to supply and control both the direct and indirect lighting, included  
08.8886.14.DA

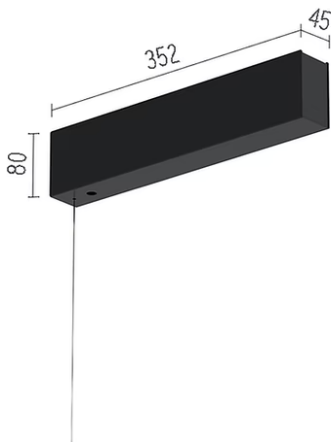

Surface power supply for direct and indirect lighting with housing for the driver  
08.8886.14



LED power supply source for remote installation in 24V/200W electric control panel. To avoid problems of overload it is recommended to install a power source every 185W. 100/240V.  
60.9352



Recessed power supply rose  
08.8889.14



Surface rose  
08.8883.14A