

The Running Magnet Suspension Down Feed Unit Profile

■ 06.1628.40 - White

Electromechanical track for suspended installations. Linear tracks available in two versions: power feed profiles for connecting to a driver, and intermediate profiles.

Main specifications

Mountings	Suspension
Environment	Indoor dry location

Electrical

Voltage (V)	24.00
Driver	Remote excluded
Driver type	Non Dimmable, Dimmable, Casambi, Dimmable DALI 1
Emergency	Without

Physical

Color	White
Weight (kg)	5.60
Length (mm)	2000

Note

Covers included with the power feed profiles.

Ceiling connection (4.2 m feed cable) and suspension (4 m steel cable) accessories included in all linear feed or intermediate products.

90° corners in the same plane (symmetrical element for right and left corners) for the Surface and Down versions. Provided for connection to the driver.

The inner part of the profile is always supplied in black.




The Running Magnet Suspension Down Feed Unit Profile



Recessed power supply rose
08.8889.40




Surface rose
08.8883.40A

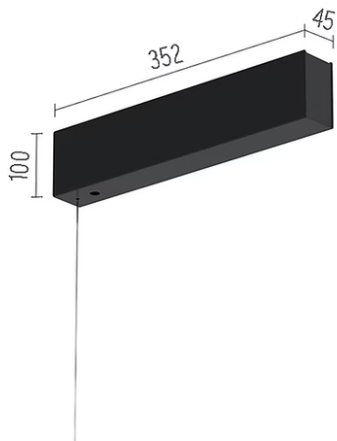

DALI controller and 24V/185W
equipment to supply and control both
the direct and indirect lighting,
included
08.8886.40.DA



LED power supply source for remote
installation in 24V/200W electric
control panel. To avoid problems of
overload it is recommended to install a
power source every 185W. 100/240V.
60.9352

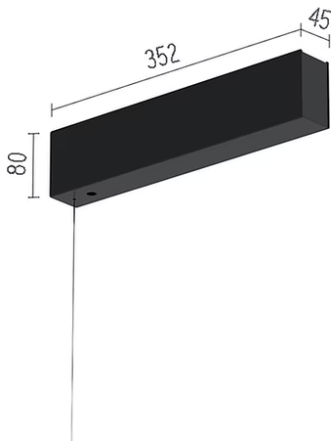

Surface power supply for direct and
indirect lighting with housing for the
driver
08.8886.40