

The Running Magnet Suspension Up&Down Feed Unit Profile

■ 06.1617.14A - Black

Electromechanical track for suspended installations. Linear elements in the Up&Down version include indirect LED illumination in the upper part of the profile. Shared or separate power feed. Linear profiles available in two versions: power feed profiles for connecting to a driver, and intermediate profiles.


Electromechanical track for suspended installations. Linear elements in the Up&Down version include indirect LED illumination in the upper part of the profile. Shared or separate power feed. Linear profiles available in two versions: power feed profiles for connecting to a driver, and intermediate profiles.

Main specifications

Lamp category	LED	Net lumen (lm)	2109
Power (W)	21W	Mountings	Suspension
System power (W)	22.1	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Indirect
LED type	Top LED
Light distribution	Symmetric
Beam angle (°)	98
Beam angle C90-270 (°)	91
Efficiency (lm/W)	95.43



Beam Angle: 91°

h(m)	E(lx)	D(m)
1	910	2.05
2	227	4.10
3	101	6.15
4	57	8.20
5	36	10.25

Luminous flux luminaire
2109 lm

Electrical

Voltage (V)	24.00
Driver	Remote excluded
Driver type	Non Dimmable, Dimmable Casambi, Dimmable DALI 1
Emergency	Without
Insulation class	III

Physical

Color	Black
Weight (kg)	7.25
Length (mm)	2500
Lifespan (L70 B10)	L80B50

Note

Covers included with the power feed profiles. Ceiling connection (4.2 m feed cable) and suspension (4m steel cable) accessories included in all linear feed or intermediate products.



90° corners in the same plane (symmetrical element for right and left corners). Not provided for connection to the driver.

The corners of the Suspended Running Magnet versions are not fitted with indirect illumination. Indirect illumination can be managed as a separate circuit if powered by a dedicated driver and, in the case of the DALI installation, if equipped with a dedicated optional DALI controller.


To be ordered separately.

Profiles cannot be cut.

The inner part of the profile is always supplied in black.




The Running Magnet Suspension Up&Down Feed Unit Profile



Electronic transformer with constant voltage (24V) for LED. 100/240V. 60W
60.9089

Recessed power supply rose
08.8889.14


Surface rose
08.8883.14A

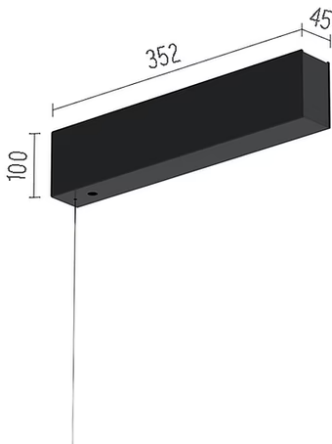

Electronic transformer with constant voltage (24V) for LED. 100/240V. 120W
60.9407

DALI controller and 24V/185W equipment to supply and control both the direct and indirect lighting, included
08.8886.14.DA

Dimmable DALI control unit with 1 channel for 24V LED modules. Power supply not included
60.8635

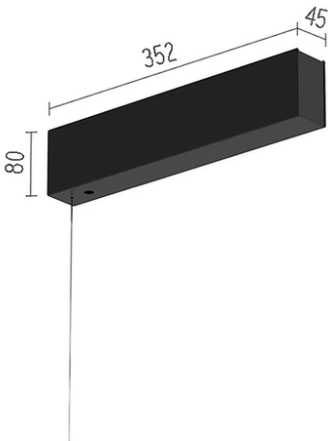

Surface power supply for direct and indirect lighting with housing for the driver
08.8881.14

LED power supply source for remote installation in 24V/200W electric control panel. To avoid problems of

power source every 185W. 100/240V.
60.9352