

## The Running Magnet Suspension Up&Down Feed Unit Profile

### 06.1617.40A - White

Electromechanical track for suspended installations. Linear elements in the Up&Down version include indirect LED illumination in the upper part of the profile. Shared or separate power feed. Linear profiles available in two versions: power feed profiles for connecting to a driver, and intermediate profiles.


Electromechanical track for suspended installations. Linear elements in the Up&Down version include indirect LED illumination in the upper part of the profile. Shared or separate power feed. Linear profiles available in two versions: power feed profiles for connecting to a driver, and intermediate profiles.

### Main specifications

<b>Lamp category</b>	LED	<b>Net lumen (lm)</b>	2109
<b>Power (W)</b>	21W	<b>Mountings</b>	Suspension
<b>System power (W)</b>	22.1	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Indirect
<b>LED type</b>	Top LED
<b>Light distribution</b>	Symmetric
<b>Beam angle (°)</b>	98
<b>Beam angle C90-270 (°)</b>	91
<b>Efficiency (lm/W)</b>	95.43



Beam Angle: 91°

h(m)	E(lx)	D(m)
1	910	2.05
2	227	4.10
3	101	6.15
4	57	8.20
5	36	10.25

Luminous flux luminaire  
2109 lm

### Electrical

<b>Voltage (V)</b>	24.00
<b>Driver</b>	Remote excluded
<b>Driver type</b>	Non Dimmable, Dimmable Casambi, Dimmable DALI 1
<b>Emergency</b>	Without
<b>Insulation class</b>	III

### Physical

<b>Color</b>	White
<b>Weight (kg)</b>	7.25
<b>Length (mm)</b>	2500
<b>Lifespan (L70 B10)</b>	L80B50

### Note

Covers included with the power feed profiles. Ceiling connection (4.2 m feed cable) and suspension (4m steel cable) accessories included in all linear feed or intermediate products.

90° corners in the same plane (symmetrical element for right and left corners). Not provided for connection to the driver.


The corners of the Suspended Running Magnet versions are not fitted with indirect illumination. Indirect illumination can be managed as a separate circuit if powered by a dedicated driver and, in the case of the DALI installation, if equipped with a dedicated optional DALI controller.

To be ordered separately.

Profiles cannot be cut.

The inner part of the profile is always supplied in black.


## The Running Magnet Suspension Up&Down Feed Unit Profile



Surface rose  
08.8883.40A




Electronic transformer with constant voltage (24V) for LED. 100/240V. 60W  
60.9089

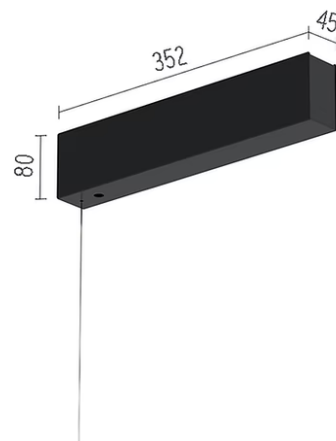

Surface power supply for direct and indirect lighting with housing for the driver  
08.8886.40



Electronic transformer with constant voltage (24V) for LED. 100/240V. 120W  
60.9407

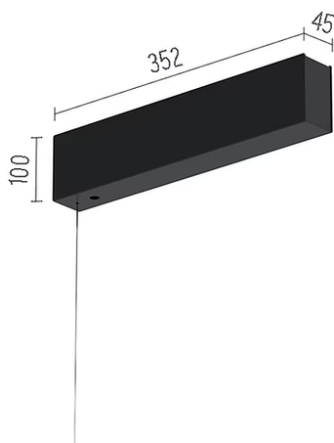

DALI controller and 24V/185W equipment to supply and control both the direct and indirect lighting, included  
08.8886.40.DA



Recessed power supply rose  
08.8889.40



Dimmable DALI control unit with 1 channel for 24V LED modules. Power



LED power supply source for remote installation in 24V/200W electric

power source every 185W. 100/240V.  
60.9352