

The Tracking Magnet Recessed Profile Casambi / Dali / 1-10V compatible

■ 06.5044.14 - Black

Electromechanical profile for recessed installation in plasterboard ceilings and walls, available in lengths from 1m to 3m.

Main specifications

Mountings	Recessed
Environment	Indoor dry location

Electrical




Voltage (V)	48
Dimmable	Yes
Driver	Remote excluded
Driver type	Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1
Emergency	Without

Physical


Color	Black
Recessed depth (mm)	45
Weight (kg)	3.74
Length (mm)	3000

Note

Version compatible with "On board dimmer" luminaries and version compatible with system controlled luminaries (DALI, 1-10V, FLOS SMART CONTROL) available. Corners, connectors and accessories common for the two profile versions. Feed connector, intermediated connector and end-caps to be ordered separately. Mechanical 90° corners available in the same plane (symmetrical element for left and right corners), symmetrical 90° inner and outer corners in different planes. Intermediate connectors to be ordered separately if electrical continuity on corners is required. Corners do not admit installation of spots. Fixed or adjustable fastening kits available (optional). The fastening kits for the roof permit installing without using aluminium fastening profiles. Recommended for installations where the Tracking Magnet can be installed before the suspended plasterboard ceiling.

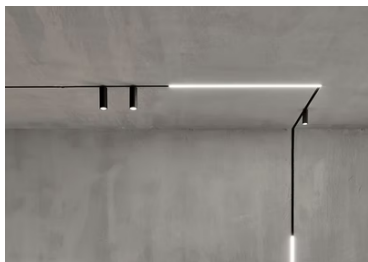

The Tracking Magnet Recessed Profile Casambi / Dali / 1-10V compatible



The Tracking Magnet Profile
Intermediate Connector Straight
08.0612.14



The Tracking Magnet Recessed Profile
End Caps
06.5008.14



LED power supply source for remote
installation, 48V/120W. 220/240 Vac
60.9170



Adjustable ceiling kit. 2 unit kit
08.8867.14



Dimmable control box 1-10V 48V
08.0613.14A



The Tracking Magnet Profile Feed
Connector
08.0611.14



Fixed ceiling kit. 2 unit kit
08.8866.14



LED Power Supply Source for remote
installation. 48V. 100Vac (150W)-240Vac
(200W)
60.9607



LED Power Supply Source for remote
installation. 48V/320W. 100/240 Vac
60.8919