

## The Tracking Magnet Recessed Profile Casambi / On Board Dimmer compatible

■ 06.5052.14 - Black

Electromechanical profile for recessed installation in plasterboard ceilings and walls, available in lengths from 1m to 3m.

### Main specifications

Mountings	Recessed
Environment	Indoor dry location

### Electrical



Voltage (V)	48
Dimmable	Yes
Driver	Remote
Driver type	Dimmer on board, Dimmable Casambi
Emergency	Without

### Physical

Color	Black
Recessed depth (mm)	45
Weight (kg)	2.5
Length (mm)	2000

### Note

Version compatible with "On board dimmer" luminaries and version compatible with system controlled luminaries (DALI, 1-10V, FLOS SMART CONTROL) available. Corners, connectors and accessories common for the two profile versions. Feed connector, intermediated connector and end-caps to be ordered separately. Mechanical 90° corners available in the same plane (symmetrical element for left and right corners), symmetrical 90° inner and outer corners in different planes. Intermediate connectors to be ordered separately if electrical continuity on corners is required. Corners do not admit installation of spots. Fixed or adjustable fastening kits available (optional). The fastening kits for the roof permit installing without using aluminium fastening profiles. Recommended for installations where the Tracking Magnet can be installed before the suspended plasterboard ceiling.

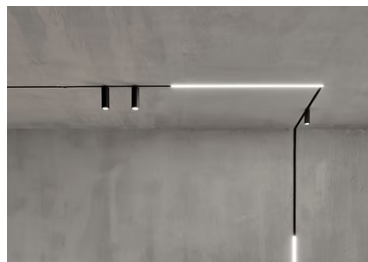

## The Tracking Magnet Recessed Profile Casambi / On Board Dimmer compatible



---

The Tracking Magnet Profile Feed  
Connector  
08.0611.14



---

LED power supply source for remote  
installation, 48V/120W. 220/240 Vac  
60.9170



---

The Tracking Magnet Profile  
Intermediate Connector Straight  
08.0612.14



---

Fixed ceiling kit. 2 unit kit  
08.8866.14



---

LED Power Supply Source for remote  
installation. 48V. 100Vac (150W)-240Vac  
(200W)  
60.9607



---

The Tracking Magnet Recessed Profile  
End Caps  
06.5008.14



---

Adjustable ceiling kit. 2 unit kit  
08.8867.14



---

LED Power Supply Source for remote  
installation. 48V/320W. 100/240 Vac  
60.8919