

The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible

06.5012.05 - Polished Aluminium

Electromechanical profile for surface-mounting, available in lengths from 1m to 3m.

Main specifications

Mountings	Surface and suspension
Environment	Indoor

Electrical


Voltage (V)	48.00
Dimmable	Yes
Driver	Remote
Driver type	Electronic
Emergency	Without

Physical

Color	Polished Aluminium
Weight (kg)	2.43
Length (mm)	2000

Note


Version compatible with "On board dimmer" luminaries and version compatible with system controlled luminaries (DALI, 1-10V, FLOS SMART CONTROL) available. Corners, connectors and accessories common for the two profile versions. Feed connector, intermediated connector, end-caps and attachment accessories to be ordered separately. Mechanical 90° corners available in the same plane (symmetrical element for left and right corner) and 90° symmetrical internal corners in a different plane. Intermediate connectors to be ordered separately if electrical continuity on corners is required. Corners do not admit installation of spots.



The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible



Surface rose
08.8883.14A

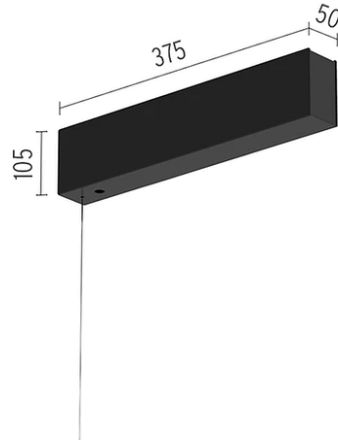

Surface power supply with 320W /
48Vdc driver included
08.0600.40



The Tracking Magnet
Surface/Suspension Profile End Caps
06.5017.05



Suspension rod with 1m rose. M6
thread
60.3014.11



Suspension rod with 1m rose. M6
thread
60.3014.14




Recessed power supply rose
08.8889.14



LED Power Supply Source for remote
installation. 48V/320W. 100/240 Vac
60.8919



The Tracking Magnet Profile Feed
Connector
08.0611.14



Surface rose
08.8883.40A



The Tracking Magnet Profile
Intermediate Connector Straight
08.0612.14



Recessed power supply rose
08.8889.40



Ceiling fixing kit
08.0616.00




1 m suspension rod with ceiling rose
with m6 thread
60.3097.14



Ceiling fixing kit
08.0615.00



1 m suspension rod with ceiling rose
with m6 thread
60.3097.11




4-pole, 0.75 mm² section, 4-meter long,
transparent power cable
06.0157.00



4m suspension steel cable
08.8634.00



Dimmable control box 1-10V 48V
08.0613.14A

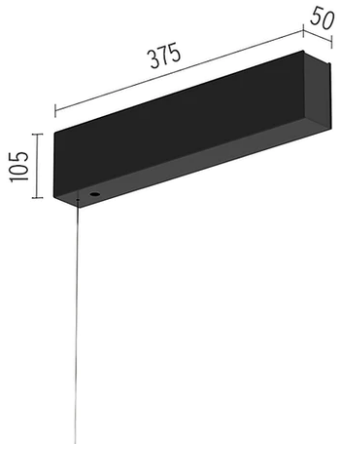

Surface power supply with 320W /
48Vdc driver included
08.0600.14