

## The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible

06.5013.05 - Polished Aluminium

Electromechanical profile for surface-mounting, available in lengths from 1m to 3m.

### Main specifications

Mountings	Surface and suspension
Environment	Indoor dry location

### Electrical

Voltage (V)	48
Dimmable	Yes
Driver	Remote excluded
Driver type	Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1
Emergency	Without

### Physical

Color	Polished Aluminium
Weight (kg)	3.04
Length (mm)	2500

### Note

Version compatible with "On board dimmer" luminaries and version compatible with system controlled luminaries (DALI, 1-10V, FLOS SMART CONTROL) available. Corners, connectors and accessories common for the two profile versions. Feed connector, intermediated connector, end-caps and attachment accessories to be ordered separately. Mechanical 90° corners available in the same plane (symmetrical element for left and right corner) and 90° symmetrical internal corners in a different plane. Intermediate connectors to be ordered separately if electrical continuity on corners is required. Corners do not admit installation of spots.



## The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible



Surface rose  
08.8883.14A




Suspension rod with 1m rose. M6 thread  
60.3014.11



LED Power Supply Source for remote installation. 48V. 100Vac (150W)-240Vac (200W)  
60.9607



LED Power Supply Source for remote installation. 48V/320W. 100/240 Vac  
60.8919

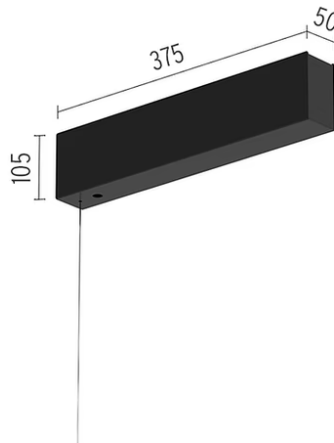


Surface power supply with 320W / 48Vdc driver included  
08.0600.40




Recessed power supply rose  
08.8889.40



4m suspension steel cable  
08.8634.00

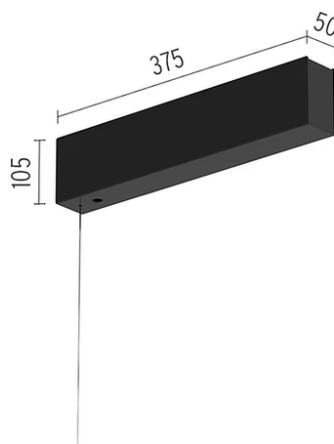

Surface power supply with 320W / 48Vdc driver included  
08.0600.14



The Tracking Magnet Profile Intermediate Connector Straight  
08.0612.14



LED power supply source for remote installation, 48V/120W. 220/240 Vac  
60.9170



Suspension rod with 1m rose. M6 thread  
60.3014.14



1 m suspension rod with ceiling rose with m6 thread  
60.3097.11



The Tracking Magnet Profile Feed Connector  
08.0611.14



1 m suspension rod with ceiling rose with m6 thread  
60.3097.14




Ceiling fixing kit  
08.0615.00




The Tracking Magnet Surface/Suspension Profile End Caps  
06.5017.05



Dimmable control box 1-10V 48V  
08.0613.14A



4-pole, 0.75 mm2 section, 4-meter long, transparent power cable  
06.0157.00



---

Surface rose  
08.8883.40A



---

Recessed power supply rose  
08.8889.14



---

Ceiling fixing kit  
08.0616.00