



## The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible

■ 06.5013.14 - Black

Electromechanical profile for surface-mounting, available in lengths from 1m to 3m.

### Main specifications

<b>Mountings</b>	Surface and suspension
<b>Environment</b>	Indoor dry location

### Electrical


<b>Voltage (V)</b>	48
<b>Dimmable</b>	Yes
<b>Driver</b>	Remote excluded
<b>Driver type</b>	Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1
<b>Emergency</b>	Without

### Physical

<b>Color</b>	Black
<b>Weight (kg)</b>	3.04
<b>Length (mm)</b>	2500

### Note


Version compatible with "On board dimmer" luminaries and version compatible with system controlled luminaries (DALI, 1-10V, FLOS SMART CONTROL) available. Corners, connectors and accessories common for the two profile versions. Feed connector, intermediated connector, end-caps and attachment accessories to be ordered separately. Mechanical 90° corners available in the same plane (symmetrical element for left and right corner) and 90° symmetrical internal corners in a different plane. Intermediate connectors to be ordered separately if electrical continuity on corners is required. Corners do not admit installation of spots.




# The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible




LED Power Supply Source for remote installation. 48V/320W. 100/240 Vac  
60.8919



Surface rose  
08.8883.14A



4-pole, 0.75 mm<sup>2</sup> section, 4-meter long, transparent power cable  
06.0157.00

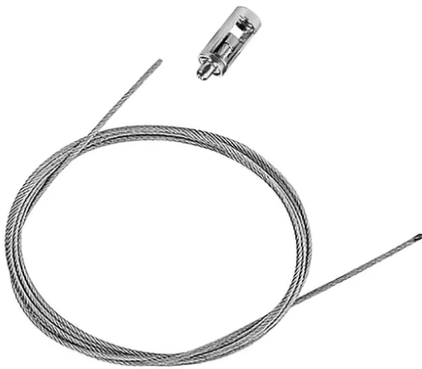


4m suspension steel cable  
08.8634.00



Suspension rod with 1m rose. M6 thread  
60.3014.11



LED Power Supply Source for remote installation. 48V. 100Vac (150W)-240Vac (200W)  
60.9607

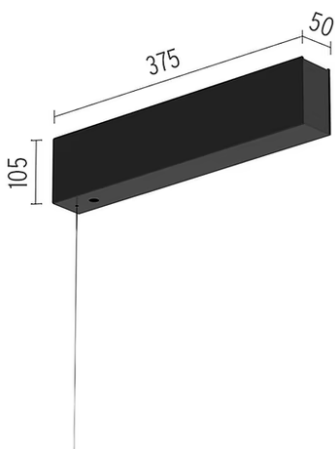


Surface power supply with 320W / 48Vdc driver included  
08.0600.40



LED power supply source for remote installation, 48V/120W. 220/240 Vac  
60.9170



Recessed power supply rose  
08.8889.40

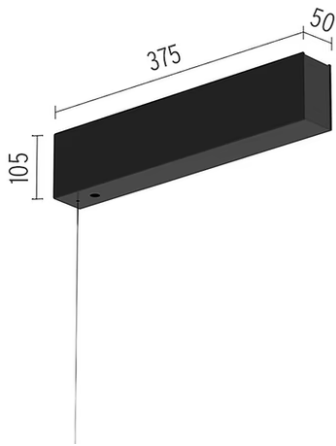

Surface power supply with 320W /  
48Vdc driver included  
08.0600.14



1 m suspension rod with ceiling rose  
with m6 thread  
60.3097.11



The Tracking Magnet Profile  
Intermediate Connector Straight  
08.0612.14



Suspension rod with 1m rose. M6  
thread  
60.3014.14



The Tracking Magnet Profile Feed  
Connector  
08.0611.14



The Tracking Magnet  
Surface/Suspension Profile End Caps  
06.5017.14




Ceiling fixing kit  
08.0615.00



Dimmable control box 1-10V 48V  
08.0613.14A



1 m suspension rod with ceiling rose  
with m6 thread  
60.3097.14



---

Surface rose  
08.8883.40A



---

Recessed power supply rose  
08.8889.14



---

Ceiling fixing kit  
08.0616.00