



## The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible

06.5014.40 - White

Electromechanical profile for surface-mounting, available in lengths from 1m to 3m.

### Main specifications

<b>Mountings</b>	Surface and suspension
<b>Environment</b>	Indoor dry location

### Electrical


<b>Voltage (V)</b>	48
<b>Dimmable</b>	Yes
<b>Driver</b>	Remote excluded
<b>Driver type</b>	Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1
<b>Emergency</b>	Without

### Physical


<b>Color</b>	White
<b>Weight (kg)</b>	3.65
<b>Length (mm)</b>	3000

### Note


Version compatible with "On board dimmer" luminaries and version compatible with system controlled luminaries (DALI, 1-10V, FLOS SMART CONTROL) available. Corners, connectors and accessories common for the two profile versions. Feed connector, intermediated connector, end-caps and attachment accessories to be ordered separately. Mechanical 90° corners available in the same plane (symmetrical element for left and right corner) and 90° symmetrical internal corners in a different plane. Intermediate connectors to be ordered separately if electrical continuity on corners is required. Corners do not admit installation of spots.



**The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible**

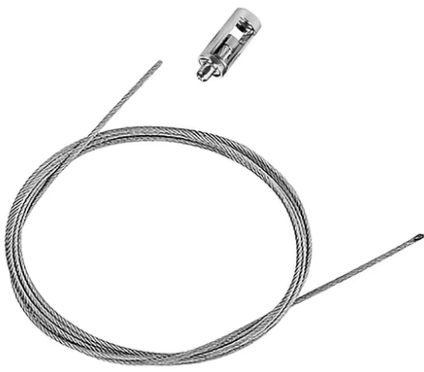

4m suspension steel cable  
08.8634.00

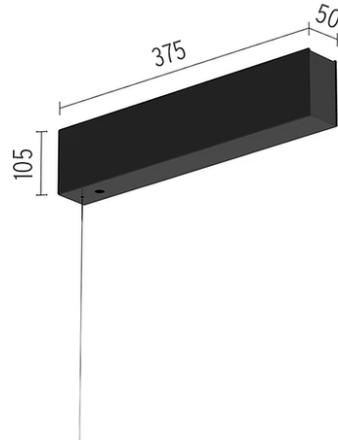

Surface power supply with 320W /  
48Vdc driver included  
08.0600.14



Suspension rod with 1m rose. M6  
thread  
60.3014.11



The Tracking Magnet  
Surface/Suspension Profile End Caps  
06.5017.40




LED Power Supply Source for remote  
installation. 48V. 100Vac (150W)-240Vac  
(200W)  
60.9607



The Tracking Magnet Profile  
Intermediate Connector Straight  
08.0612.14



LED Power Supply Source for remote  
installation. 48V/320W. 100/240 Vac  
60.8919




Surface rose  
08.8883.14A



The Tracking Magnet Profile Feed  
Connector  
08.0611.14



LED power supply source for remote installation, 48V/120W. 220/240 Vac  
60.9170

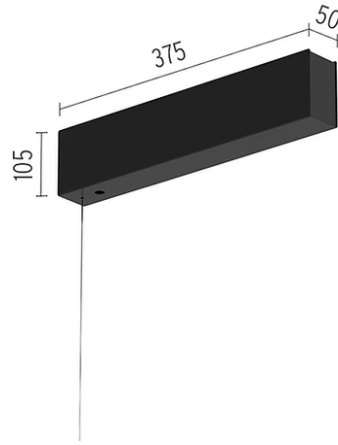

Surface power supply with 320W / 48Vdc driver included  
08.0600.40




Recessed power supply rose  
08.8889.40



Suspension rod with 1m rose. M6 thread  
60.3014.14



1 m suspension rod with ceiling rose with m6 thread  
60.3097.11



Surface rose  
08.8883.40A



Recessed power supply rose  
08.8889.14



Ceiling fixing kit  
08.0616.00




1 m suspension rod with ceiling rose with m6 thread  
60.3097.14



---

Ceiling fixing kit  
08.0615.00



---

4-pole, 0.75 mm<sup>2</sup> section, 4-meter long,  
transparent power cable  
06.0157.00