



The Tracking Magnet Surface/Suspension Profile Casambi / On Board Dimmer compatible

■ 06.5061.14 - Black

Electromechanical profile for surface-mounting, available in lengths from 1m to 3m.

Main specifications

Mountings	Surface and suspension
Environment	Indoor dry location

Electrical


Voltage (V)	48
Dimmable	Yes
Driver	Remote
Driver type	Dimmer on board, Dimmable Casambi
Emergency	Without

Physical


Color	Black
Weight (kg)	1.82
Length (mm)	1500

Note

Version compatible with "On board dimmer" luminaries and version compatible with system controlled luminaries (DALI, 1-10V, FLOS SMART CONTROL) available. Corners, connectors and accessories common for the two profile versions. Feed connector, intermediated connector, end-caps and attachment accessories to be ordered separately. Mechanical 90° corners available in the same plane (symmetrical element for left and right corner) and 90° symmetrical internal corners in a different plane. Intermediate connectors to be ordered separately if electrical continuity on corners is required. Corners do not admit installation of spots.



The Tracking Magnet Surface/Suspension Profile Casambi / On Board Dimmer compatible

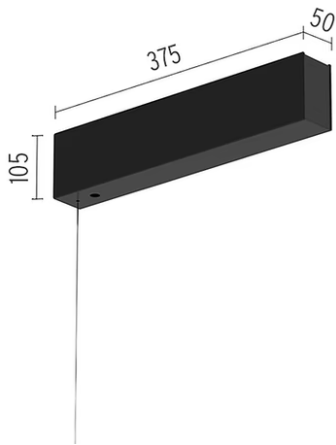

Surface power supply with 320W / 48Vdc driver included
08.0600.40




LED Power Supply Source for remote installation. 48V/320W. 100/240 Vac
60.8919



Surface rose
08.8883.14A



The Tracking Magnet
Surface/Suspension Profile End Caps
06.5017.14

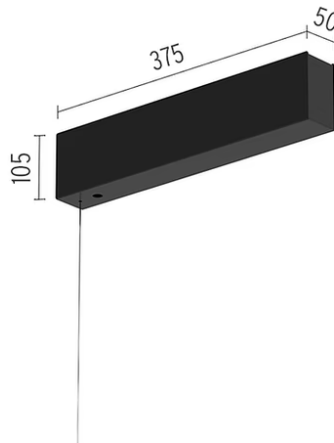

Surface power supply with 320W / 48Vdc driver included
08.0600.14



Suspension rod with 1m rose. M6 thread
60.3014.11




LED Power Supply Source for remote installation. 48V. 100Vac (150W)-240Vac (200W)
60.9607



Ceiling fixing kit
08.0616.00



LED power supply source for remote installation, 48V/120W. 220/240 Vac
60.9170




4-pole, 0.75 mm² section, 4-meter long,
transparent power cable
06.0157.00



Ceiling fixing kit
08.0615.00



Recessed power supply rose
08.8889.40

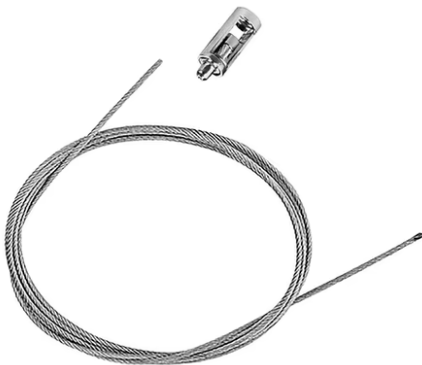

4m suspension steel cable
08.8634.00



The Tracking Magnet Profile
Intermediate Connector Straight
08.0612.14



Suspension rod with 1m rose. M6
thread
60.3014.14



1 m suspension rod with ceiling rose
with m6 thread
60.3097.11



1 m suspension rod with ceiling rose
with m6 thread
60.3097.14



The Tracking Magnet Profile Feed
Connector
08.0611.14



Surface rose
08.8883.40A



Recessed power supply rose
08.8889.14