



The Tracking Magnet Surface/Suspension Profile Casambi / On Board Dimmer compatible

06.5061.40 - White

Electromechanical profile for surface-mounting, available in lengths from 1m to 3m.

Main specifications

Mountings	Surface and suspension
Environment	Indoor dry location

Electrical


Voltage (V)	48
Dimmable	Yes
Driver	Remote
Driver type	Dimmer on board, Dimmable Casambi
Emergency	Without

Physical

Color	White
Weight (kg)	1.82
Length (mm)	1500

Note

Version compatible with "On board dimmer" luminaries and version compatible with system controlled luminaries (DALI, 1-10V, FLOS SMART CONTROL) available. Corners, connectors and accessories common for the two profile versions. Feed connector, intermediated connector, end-caps and attachment accessories to be ordered separately. Mechanical 90° corners available in the same plane (symmetrical element for left and right corner) and 90° symmetrical internal corners in a different plane. Intermediate connectors to be ordered separately if electrical continuity on corners is required. Corners do not admit installation of spots.



The Tracking Magnet Surface/Suspension Profile Casambi / On Board Dimmer compatible




LED Power Supply Source for remote installation. 48V. 100Vac (150W)-240Vac (200W)
60.9607



Surface rose
08.8883.14A




LED Power Supply Source for remote installation. 48V/320W. 100/240 Vac
60.8919

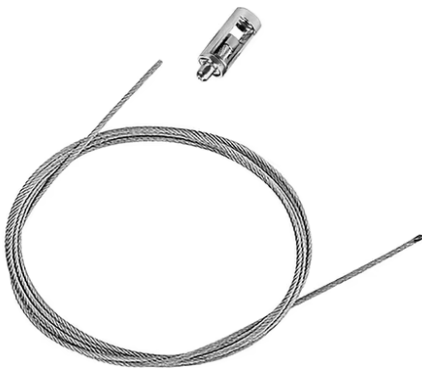

4m suspension steel cable
08.8634.00



Suspension rod with 1m rose. M6 thread
60.3014.11

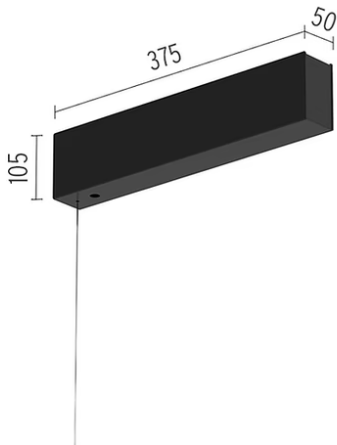

Surface power supply with 320W / 48Vdc driver included
08.0600.40



Ceiling fixing kit
08.0615.00



Recessed power supply rose
08.8889.40



LED power supply source for remote installation, 48V/120W. 220/240 Vac
60.9170



1 m suspension rod with ceiling rose
with m6 thread
60.3097.11



The Tracking Magnet Profile
Intermediate Connector Straight
08.0612.14




Ceiling fixing kit
08.0616.00



The Tracking Magnet
Surface/Suspension Profile End Caps
06.5017.40



Suspension rod with 1m rose. M6
thread
60.3014.14




4-pole, 0.75 mm2 section, 4-meter long,
transparent power cable
06.0157.00



The Tracking Magnet Profile Feed
Connector
08.0611.14



1 m suspension rod with ceiling rose
with m6 thread
60.3097.14

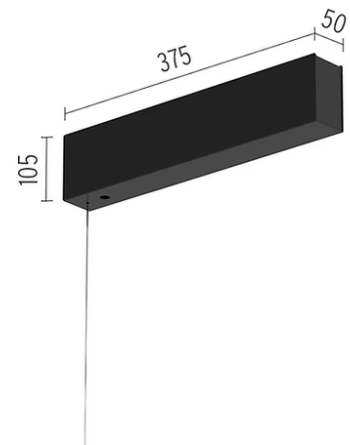

Surface power supply with 320W /
48Vdc driver included
08.0600.14



Surface rose
08.8883.40A



Recessed power supply rose
08.8889.14