

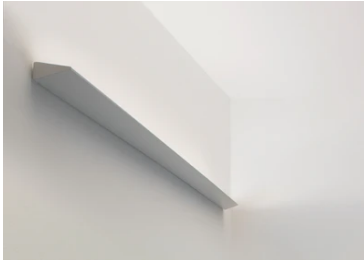


## Thin LED 1034 mm

■ 09.0100.29B - Anodized Aluminium

Wall application luminaire for indirect lighting with LED. Remote transformer not included.




### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	1863
<b>Lamp category</b>	LED	<b>Mountings</b>	Wall surface
<b>Power (W)</b>	20.5W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Indirect
<b>LED type</b>	Top LED
<b>Light distribution</b>	Asymmetric
<b>Optical type</b>	Diffused light
<b>Beam angle (°)</b>	101
<b>Beam angle C90-270 (°)</b>	43



<b>Beam Angle: 43°</b>		
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>
1	355	6.46
2	89	12.92
3	39	19.38
4	22	25.84
5	14	32.30

Luminous flux luminaire  
1863 lm

### Electrical


<b>Voltage (V)</b>	24.00	<b>Insulation class</b>	III
<b>Dimmable</b>	No		
<b>Driver</b>	Remote excluded		
<b>Driver type</b>	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1		
<b>Emergency</b>	Without		

### Physical

<b>Color</b>	Anodized Aluminium
<b>Orientation</b>	Fixed
<b>Weight (kg)</b>	0.30
<b>Length (mm)</b>	1034

### Note

42 LEDs



## Thin LED 1034 mm



---

Dimmable DALI control unit with 1 channel for 24V LED modules. Power supply not included  
60.8635



---

Electronic transformer with constant voltage (24V) for LED. 100/240V. 25W  
60.8703



---

Dimmable 1-10V control unit with 1 channel for 24V LED modules. Max. 120W – 5A  
60.8640



---

Electronic transformer with constant voltage (24V) for LED. 100/240V. 120W  
60.9407



---

Electronic transformer with constant voltage (24V) for LED. 100/240V. 60W  
60.9089