



## Thin LED 1034 mm

■ 09.0100.BZB - Anodized Bronze

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

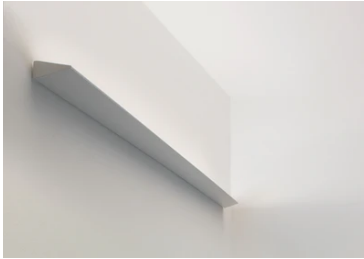


### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	1863
<b>Lamp category</b>	LED	<b>Mountings</b>	Wall surface
<b>Power (W)</b>	20.5W	<b>Environment</b>	Indoor
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Indirect
<b>LED type</b>	Top LED
<b>Light distribution</b>	Asymmetric
<b>Optical type</b>	Diffused light
<b>Beam angle (°)</b>	101
<b>Beam angle C90-270 (°)</b>	43



Beam Angle: 43°

h(m) E(lx) D(m)

1 355 6.46

2 89 12.92

3 39 19.38

4 22 25.84

5 14 32.30

Luminous flux luminaire  
1863 lm

### Electrical

<b>Voltage (V)</b>	24.00	<b>Insulation class</b>	III
<b>Dimmable</b>	No		
<b>Driver</b>	Remote		
<b>Driver type</b>	Electronic		
<b>Emergency</b>	Without		


### Physical

<b>Color</b>	Anodized Bronze
<b>Orientation</b>	Fixed
<b>Weight (kg)</b>	0.30
<b>Length (mm)</b>	1034

### Note

42 LEDs

### Certification / Marking



## Thin LED 1034 mm



---

Dimmable 1-10V control unit with 1 channel for 24V LED modules. Max. 120W – 5A  
60.8640



---

Electronic transformer with constant voltage (24V) for LED. 100/240V. 60W  
60.9089



---

Electronic transformer with constant voltage (24V) for LED. 100/240V. 120W  
60.9407



---

Electronic transformer with constant voltage (24V) for LED. 100/240V. 25W  
60.8703



---

Dimmable Dali control unit with 1 channel for 24V LED modules. Maximum length 5 m/92,5W  
60.8635