



Thin LED 1201 mm

■ 09.0120.BZB - Anodized Bronze

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

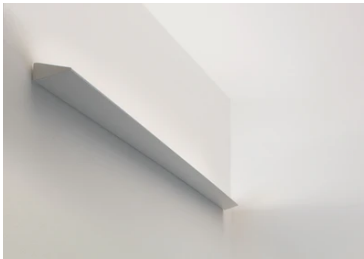


Main specifications

Number of heads	1	Net lumen (lm)	2173
Lamp category	LED	Mountings	Wall surface
Power (W)	23.9W	Environment	Indoor
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Indirect
LED type	Top LED
Light distribution	Asymmetric
Optical type	Diffused light
Beam angle (°)	101
Beam angle C90-270 (°)	43



Beam Angle: 43°

h(m)	E(lx)	D(m)
1	414	6.46
2	104	12.92
3	46	19.38
4	26	25.84
5	17	32.30

Luminous flux luminaire
2173 lm

Electrical

Voltage (V)	24.00	Insulation class	III
Dimmable	No		
Driver	Remote		
Driver type	Electronic		
Emergency	Without		


Physical

Color	Anodized Bronze
Orientation	Fixed
Weight (kg)	0.90m
Length (mm)	1201

Note

55 LEDs

Certification / Marking



Thin LED 1201 mm



Dimmable 1-10V control unit with 1 channel for 24V LED modules. Max. 120W – 5A
60.8640



Electronic transformer with constant voltage (24V) for LED. 100/240V. 60W
60.9089



Electronic transformer with constant voltage (24V) for LED. 100/240V. 120W
60.9407



Electronic transformer with constant voltage (24V) for LED. 100/240V. 25W
60.8703



Dimmable Dali control unit with 1 channel for 24V LED modules. Maximum length 5 m/92,5W
60.8635