



Thin LED 2040 mm

■ 09.0101.BZB - Anodized Bronze

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

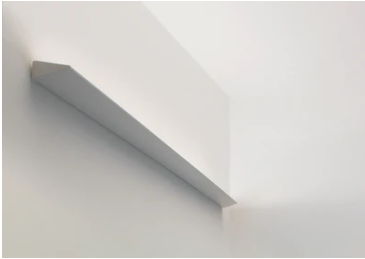


Main specifications

Number of heads	1	Net lumen (lm)	3726
Lamp category	LED	Mountings	Wall surface
Power (W)	41W	Environment	Indoor
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Indirect
LED type	Top LED
Light distribution	Asymmetric
Optical type	Diffused light
Beam angle (°)	101
Beam angle C90-270 (°)	43

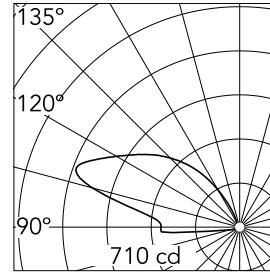

Beam Angle: 43°

	h(m)	E(lx)	D(m)
1	710	6.46	
2	178	12.92	
3	79	19.38	
4	44	25.84	
5	28	32.30	

Luminous flux luminaire
3726 lm


Electrical

Voltage (V)	24.00	Insulation class	III
Dimmable	No		
Driver	Remote		
Driver type	Electronic		
Emergency	Without		

Physical

Color	Anodized Bronze
Orientation	Fixed
Weight (kg)	0.90m
Length (mm)	2040

Certification / Marking



Note

84 LEDs

Thin LED 2040 mm



Dimmable 1-10V control unit with 1 channel for 24V LED modules. Max. 120W – 5A
60.8640



Electronic transformer with constant voltage (24V) for LED. 100/240V. 60W
60.9089



Electronic transformer with constant voltage (24V) for LED. 100/240V. 120W
60.9407



Electronic transformer with constant voltage (24V) for LED. 100/240V. 25W
60.8703



Dimmable Dali control unit with 1 channel for 24V LED modules. Maximum length 5 m/92,5W
60.8635