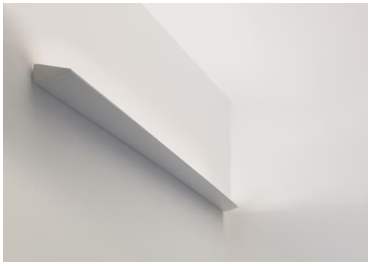




# Thin LED 2541 mm

**09.0102.BZB - Anodized Bronze**

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

## Main specifications

| | | | |
|---|---|---|---|
| **Number of heads** | 1 | **Net lumen (lm)** | 4657 |
| **Lamp category** | LED | **Mountings** | Wall surface |
| **Power (W)** | 47.8W | **Environment** | Indoor dry location |
| **CCT (K)** | 3000K | | |
| **CRI** | 90 | | |

## Optical

| | |
|---|---|
| **Lighting type** | Indirect |
| **LED type** | Top LED |
| **Light distribution** | Asymmetric |
| **Optical type** | Diffused light |
| **Beam angle (°)** | 101 |
| **Beam angle C90-270 (°)** | 43 |




Luminous flux luminaire
4657 lm

Beam Angle: 43°

| h(m) | E(lx) | D(m) |
|---|---|---|
| 1 | 888 | 6.46 |
| 2 | 222 | 12.92 |
| 3 | 99 | 19.38 |
| 4 | 55 | 25.84 |
| 5 | 36 | 32.30 |

## Electrical

| | | | |
|---|---|---|---|
| **Voltage (V)** | 24.00 | **Insulation class** | III |
| **Dimmable** | No | | |
| **Driver** | Remote excluded | | |
| **Driver type** | Non Dimmable, Dimmable 1-10V, Dimmable DALI 1 | | |
| **Emergency** | Without | | |

## Physical

| | |
|---|---|
| **Color** | Anodized Bronze |
| **Orientation** | Fixed |
| **Weight (kg)** | 0.90m |
| **Length (mm)** | 2541 |

## Note

105 LEDs

# Thin LED 2541 mm

Dimmable DALI control unit with 1 channel for 24V LED modules. Power supply not included
60.8635

Electronic transformer with constant voltage (24V) for LED. 100/240V. 25W
60.8703

Dimmable 1-10V control unit with 1 channel for 24V LED modules. Max. 120W – 5A
60.8640

Electronic transformer with constant voltage (24V) for LED. 100/240V. 60W
60.9089

Electronic transformer with constant voltage (24V) for LED. 100/240V. 120W
60.9407