



Thin LED 3042 mm

■ 09.0103.BZB - Anodized Bronze

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

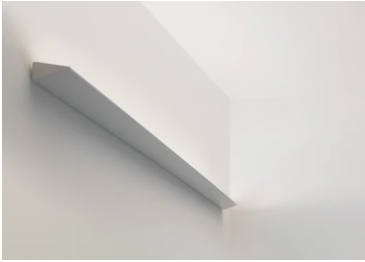


Main specifications

Number of heads	1	Net lumen (lm)	5588
Lamp category	LED	Mountings	Wall surface
Power (W)	61.5W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Indirect
LED type	Top LED
Light distribution	Asymmetric
Optical type	Diffused light
Beam angle (°)	101
Beam angle C90-270 (°)	43



Beam Angle: 43°		
h(m)	E(lx)	D(m)
1	1065	6.46
2	266	12.92
3	118	19.38
4	67	25.84
5	43	32.30

Luminous flux luminaire
5588 lm

Electrical


Voltage (V)	24.00	Insulation class	III
Dimmable	No		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1		
Emergency	Without		

Physical

Color	Anodized Bronze
Orientation	Fixed
Weight (kg)	0.90m
Length (mm)	3042

Note

126 LEDs



Thin LED 3042 mm



Electronic transformer with constant voltage (24V) for LED. 100/240V. 120W
60.9407



Electronic transformer with constant voltage (24V) for LED. 100/240V. 60W
60.9089



Dimmable 1-10V control unit with 1 channel for 24V LED modules. Max. 120W – 5A
60.8640



Dimmable DALI control unit with 1 channel for 24V LED modules. Power supply not included
60.8635



Electronic transformer with constant voltage (24V) for LED. 100/240V. 25W
60.8703