


Three Phase Track Surface/Pendant Dali 3000 mm

60.3103.11ADA - Matt White

GLOBAL PRO offers benefits for advanced installations: the main connectors are feedable and the feeding cable can be hidden under the elegant suspension accessories. GLOBAL PRO lighting tracks are designed for easy surface mounting on ceilings and walls, or recessed mounting in suspended ceilings. Lighting tracks can be suspended at any desired height. Other advantages of...

GLOBAL PRO offers benefits for advanced installations: the main connectors are feedable and the feeding cable can be hidden under the elegant suspension accessories. GLOBAL PRO lighting tracks are designed for easy surface mounting on ceilings and walls, or recessed mounting in suspended ceilings. Lighting tracks can be suspended at any desired height. Other advantages of the three-circuit system are its high loading capacity and the possibility of forming independent fixture groups in all three circuits. This permits illumination of the most demanding environments.



Main specifications

Mountings	Surface and suspension
Environment	Indoor

Electrical

Emergency Insulation class	Without I
-----------------------------------	-----------

Physical

Color	Matt White
Weight (kg)	0.80
Length (mm)	3000



Three Phase Track Surface/Pendant Dali 3000 mm



Ceiling fitting with rose
60.3094.11



Ceiling fitting with rose
60.3094.14



Attachment on track for rod
suspension m6 thread
60.3018.11



Attachment on track for rod
suspension m6 thread
60.3018.14



Lead-weighted wire 1500 mm
60.3095.29



Lead-weighted wire 3000 mm
60.3096.29



Bracket
60.3025.29



Bracket
60.3025.14



Bracket
60.3025.11



Bracket for fixing track to wall or ceiling
60.3093.29



Attachment on track for wire suspension
60.3057.11



Attachment on track for wire suspension
60.3057.29



Complete wall support 70 mm
60.3083.29



Power supply rose cover
60.3092.11



Mean connector Dali
60.3043.11ADA



Mean connector Dali
60.3043.14ADA



Mean connector Dali
60.3043.29ADA



Connector 90° Inside Dali
60.3029.11ADA



Connector 90° Inside Dali
60.3029.14ADA



Connector 90° Inside Dali
60.3029.29ADA



Connector 90° Outside Dali
60.3028.11ADA



Connector 90° Outside Dali
60.3028.14ADA



Connector 90° Outside Dali
60.3028.29ADA



Connector T – Inside Right Dali
60.3047.11ADA



Connector T – Inside Right Dali
60.3047.14ADA



Connector T – Inside Right Dali
60.3047.29ADA



Connector T – Inside Left Dali
60.3048.11ADA



Connector T – Inside Left Dali
60.3048.14ADA



Connector T – Inside Left Dali
60.3048.29ADA



Cross Coupling Dali
60.3036.11ADA





Cross Coupling Dali
60.3036.14ADA



Cross Coupling Dali
60.3036.29ADA



Track cover strip L 3000 mm
60.3090.11



Blind end
60.3016.11



Blind end
60.3016.14



Blind end
60.3016.12



Straight Connector Dali
60.3044.11ADA




Straight Connector Dali
60.3044.14ADA



Straight Connector Dali
60.3044.12ADA



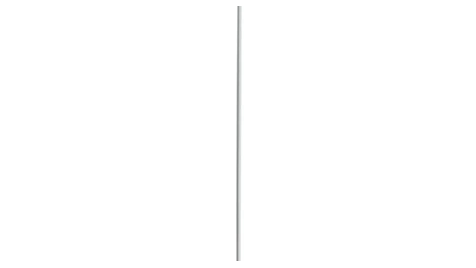

Suspension rod with 1m rose. M6 thread

60.3014.11



Suspension rod with 1m rose. M6 thread
60.3014.14

Lead bending key
60.3054

1 m suspension rod with ceiling rose with m6 thread
60.3097.11



1 m suspension rod with ceiling rose with m6 thread
60.3097.14