

Tubular Bells Pro Wall

■ 07.9480.ASB - Aluminum

Luminaire for wall mounting with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.




Main specifications

Number of heads	1	Net lumen (lm)	412
Lamp category	LED	Mountings	Wall surface
Power (W)	7.4W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	98		


Optical

Lighting type	Indirect, Direct
LED type	Phosphor LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	21
Beam angle C90-270 (°)	21



Beam Angle:	21°		
h(m)	E(lx)	D(m)	
1	2341	0.38	
2	585	0.75	
3	260	1.13	
4	146	1.50	
5	94	1.88	

Luminous flux luminaire
412 lm (EXTREME CUT OFF)

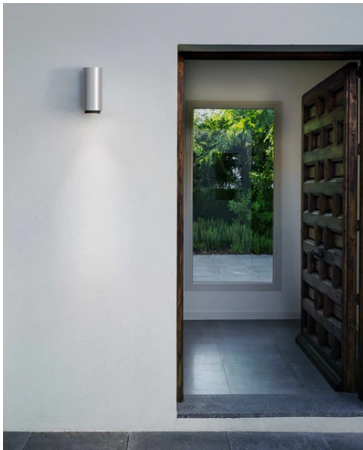

Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	I
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		

Physical

Color	Aluminum
Orientation	Fixed
Weight (kg)	0.90

