



USB Round 2L

SA.3018.1 - Raw

Recessed luminaire for 12V lamp. 220/240V, 50/60Hz. Adjustable by means of "leading and trailing edge". Remote transformer not included.

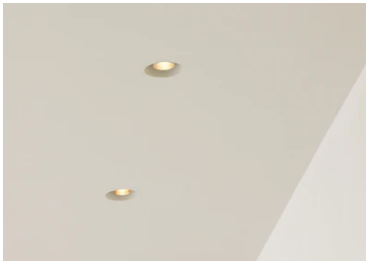

Main specifications

Lamp category	LED retrofit
Mountings	Ceiling recessed
Environment	Indoor dry location

Optical


Lighting type	Direct
Lamp type	QR-CBC 51
Light distribution	Symmetric

Electrical

Voltage (V)	12.00	Emergency	Without
Lamp holder	GX5.3		
Dimmable	No		
Driver	Remote excluded		
Driver type	Non Dimmable		

Physical

Color	Raw
Orientation	Fixed
Weight (kg)	3



USB Round 2L



12V Electronic Transformer 20-70W for
LED Bulbs and Halogen Lamps
60.9398

Anti-Glare
08.8270.00

12V electronic transformer. 220/240V,
50/60Hz. Adjustable by means of
"leading and trailing edge"
60.9424