



### USO 140 90 Cove Lighting

#### SA.1011.5D110 - Raw

Recessed ceiling luminaire. Direct lighting with fluorescent, cold cathode or LED lamps. Control gear not included in LED versions. See LED LED drivers.

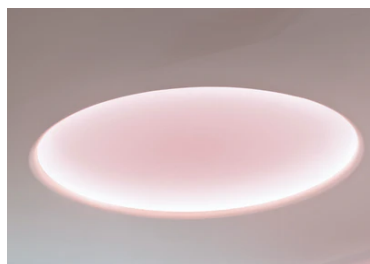


#### Main specifications

Number of heads	21	Mountings	Ceiling recessed
Lamp category	LED	Environment	Indoor dry location
Power (W)	75,5W		
CCT (K)	3000K		
CRI	90		

#### Optical

Lighting type	Direct
Light distribution	Symmetric
Optical type	Diffused light



Beam Angle: 138°

h(m)	E(lx)	D(m)
1	414	5.23
2	104	10.45
3	46	15.68
4	26	20.90
5	17	26.13

Luminous flux luminaire  
1474 lm

#### Electrical

Voltage (V)	24
Dimmable	No
Driver	Remote excluded
Emergency	Without

#### Physical

Color	Raw
Orientation	Fixed
Recessed depth (mm)	180
Weight (kg)	40
Length (mm)	1400