

## UT Pro 150 On Board Dimmer

09.7212.40A - White




Spotlight to be installed in Tracking Power profile with LED light source. 120-277V power supply integrated. High performance reflector included. .40 versions come with the track adapter, the arm and the rear of the head in black.

### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	2198
<b>Lamp category</b>	LED	<b>Mountings</b>	Track
<b>Power (W)</b>	23.5W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	80		



### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	LED array
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Medium
<b>Beam angle (°)</b>	28
<b>Beam angle C90-270 (°)</b>	28



Beam Angle:	28°	
	h(m)	E(lx) D(m)
	1	10158 0.50
	2	2540 1.00
	3	1129 1.50
	4	635 2.00
	5	406 2.50

Luminous flux luminaire  
2198 lm

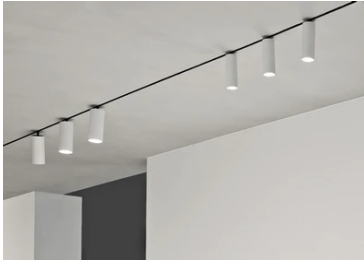

### Electrical

<b>Frequency (Hz)</b>	50/60	<b>Emergency</b>	Without
<b>Voltage (V)</b>	220.00	<b>Insulation class</b>	II
<b>Dimmable</b>	Yes		
<b>Driver</b>	Integrated		
<b>Driver type</b>	Dimmer on board		

### Physical

<b>Color</b>	White	<b>Spot diameter (mm)</b>	57
<b>Orientation</b>	Adjustable		
<b>Weight (kg)</b>	0.56		
<b>Tilt (°)</b>	90		
<b>Rotation (°)</b>	360		

### Note

Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with honeycomb + lense at the same time.



## UT Pro 150 On Board Dimmer



---

Screening crosspiece  
08.8429.00



---

Honeycomb  
08.8428.00



---

Snoot shielding cone  
08.0526.BW



---

Flood lens  
08.8432.00



---

Snoot shielding cone  
08.0526.40



---

Snoot shielding cone  
08.0526.00



---

Elliptical lens  
08.8431.00